

**INSTITUT BELGE DES SERVICES POSTAUX
ET DES TÉLÉCOMMUNICATIONS**

I B P T

**COMMUNICATION DU CONSEIL DU PREMIER MARS 2019 CONCERNANT
LES SPÉCIFICATIONS TECHNIQUES MINIMALES POUR LES SYSTÈMES
D'ANTENNES INDOOR**

TABLE DES MATIÈRES

- Executive Summary 3
- 1. Systèmes d’antennes indoor (DAS) 4
- 2. Problèmes liés aux systèmes d’antennes indoor 4
- 3. Spécifications techniques minimales 5
- 4. Pas d’obligation légale 5
- 5. Système de notification IBPT 6
- 6. Couverture indoor en fonction de la technologie 6
- 7. Entrepreneurs DAS 6
- 8. Suite des travaux 6
- 9. Révision de la communication 6
- 10. Annexes 7

Executive Summary

Il ressort de la communication de l'IBPT du 22 juin 2016 concernant la problématique de la couverture indoor qu'il serait souhaitable que les nouveaux bâtiments soient équipés de préférence d'un système DAS multi-opérateurs et multi-technologique. Un groupe de travail réunissant des parties prenantes a fixé les spécifications techniques minimales recommandées pour les systèmes DAS. L'IBPT publie ces directives dans la présente communication. En effet, ces systèmes DAS devraient être réalisés dans les règles de l'art.

Les directives jointes ne sont que des recommandations. Aucune spécification technique légalement obligatoire n'est donc imposée.

L'IBPT a développé un outil faisant office de point de contact. Celui-ci est déjà disponible en ligne (<https://www.modas.bipt.be/>).

Cette communication remplace la communication du 15 septembre 2017.

1. Systèmes d'antennes indoor (DAS¹)

Un système indoor ou DAS est un réseau passif d'antennes placées à l'intérieur d'un bâtiment et connectées à l'aide de câbles à un « hub » central. Ce hub est généralement installé dans un espace technique spécial.

Ce système peut appartenir au propriétaire du bâtiment ou à une firme spécialisée. Un tel système est de préférence neutre en ce qui concerne la technologie, la bande de fréquences et l'opérateur télécoms qui réalise le raccordement. Idéalement, un DAS doit donc être équipé pour desservir les différentes bandes de fréquences habituelles (700/800/900/1500/1800/2100/2500/2600 MHz) pour la 2G/3G/4G et ainsi permettre à la concurrence entre les fournisseurs de services sans fil de s'exercer pleinement. À l'avenir, ces systèmes indoor devront être adaptés à la 5G.

2. Problèmes liés aux systèmes d'antennes indoor.

Un certain nombre de situations problématiques se posent :

1) En cas de changement de locataire

Les infrastructures pour la couverture indoor peuvent poser des problèmes lors de la location d'un immeuble de bureaux. En quittant un bâtiment, le locataire est obligé de remettre le bâtiment en l'état d'origine. Cela signifie que les équipements pour la couverture indoor doivent être démontés. Il se peut que l'installation puisse être utilisée en tout ou en partie par le locataire suivant. Il est possible de convenir avec l'opérateur mobile de transférer les installations au locataire suivant, mais les responsabilités ne sont pas toujours clairement définies (qui paie pour l'arrangement, qu'en est-il du système DAS existant...).

2) Lors de l'évaluation des contrats existants

Bon nombre d'autorités publiques et de bailleurs privés réévaluent régulièrement leurs contrats avec les opérateurs mobiles en vue de conclure un accord compétitif et conforme au marché. Une migration rapide entre les opérateurs requiert des exigences techniques minimales communes de manière à permettre une comparaison efficace des différentes offres et une migration sans accroc.

3) Besoin accru de systèmes multi-opérateurs

Pour les grands immeubles de bureaux, les hôpitaux, les centres commerciaux, etc., une couverture par un seul opérateur n'est ni suffisante ni souhaitable. Les locataires, visiteurs et/ou travailleurs apportent leur propre appareil terminal (BYOD²) de sorte qu'il doit y avoir une couverture par chaque opérateur mobile. Il est important que tous les opérateurs puissent se raccorder au même DAS.

¹ Distributed Antenna System

² BYOD : Bring Your Own Device

4) Différenciation pour le propriétaire

Une bonne couverture mobile devient, de plus en plus, un besoin fondamental pour les bâtiments modernes. La couverture intérieure devient un atout pour chaque bailleur, lui permettant de se distinguer des autres offres sur le marché de la location.

Il est préférable de prévoir les systèmes DAS pour les nouveaux immeubles dès la phase de conception, tout comme la tension, les lignes téléphoniques, etc. En principe, un DAS peut appartenir au propriétaire de l'immeuble, à un opérateur ou à un tiers (par exemple un opérateur télécoms, une firme spécialisée dans la couverture indoor). La construction d'une telle infrastructure télécoms nécessite des connaissances spécialisées en matière de propagation des ondes radio. Souvent, les architectes et les entreprises de construction ne disposent pas de ces connaissances et doivent acquérir le savoir-faire nécessaire. Des firmes spécialisées pourraient idéalement fournir des avis ou des services à ce sujet.

3. Spécifications techniques minimales

Il ressort de la communication de l'IBPT du 22 juin 2016 concernant la problématique de la couverture indoor qu'il serait souhaitable que les nouveaux bâtiments soient équipés de préférence d'un système DAS multi-opérateurs et multi-technologique. Dans cette communication, l'IBPT a proposé de conclure des arrangements clairs avec les opérateurs mobiles. Ces systèmes DAS devraient être implémentés dans les règles de l'art.

Un groupe de travail réunissant des parties prenantes (IBPT, ORI³, Confédération Construction, opérateurs, Agoria, Beltug) a fixé les **spécifications techniques minimales** recommandées pour les systèmes DAS.

4. Pas d'obligation légale

Les directives ne sont que des recommandations. Aucune spécification technique légalement obligatoire n'est donc imposée. Une obligation légale impliquerait en effet qu'il faudrait prévoir un mécanisme de contrôle (par exemple sous la forme d'une certification par un organe de contrôle indépendant), ce qui alourdirait l'ensemble du processus. Les mesures de contrôle seront quoi qu'il en soit réalisées par les MNO avant de raccorder leur équipement actif au réseau DAS.

Plutôt que des obligations légales, il a été opté pour des mesures d'autorégulation, dans le cadre desquelles les parties prenantes ont développé un mécanisme et un processus de collaboration sur une base volontaire. L'IBPT est d'avis que suivre ces recommandations constitue une garantie pour les propriétaires que l'installation d'un DAS M-O sera réalisée correctement.

L'IBPT n'intervient que dans la phase de préconception. Lors de cette première étape, les propriétaires ou maîtres d'ouvrage envoient une notification à l'IBPT l'informant qu'ils souhaitent mettre sur pied un système DAS M-O. L'IBPT consultera ensuite les opérateurs mobiles qui feront part de leur intérêt à participer ou non au projet. Toutes les étapes ultérieures se dérouleront entre les propriétaires de l'immeuble, les opérateurs et l'entrepreneur DAS.

Il va de soi qu'un maître d'ouvrage est libre de suivre ou non la procédure recommandée et d'opter par exemple pour un « single operator DAS ».

³ ORI : Organisation des bureaux d'ingénieurs-conseils, d'ingénierie et de consultance

5. Système de notification IBPT

Dans une première phase du projet, les candidats-maîtres d'ouvrage transmettent une demande de connectivité d'un DAS multi-opérateurs à un point de contact. Ce point de contact transmet cette demande aux opérateurs qui confirment ou non leur intérêt.

L'IBPT a développé cet outil. Celui-ci est déjà disponible en ligne (<https://www.modas.bipt.be/>).

L'outil logiciel a les caractéristiques suivantes :

- prévoir une capacité de stockage suffisante pour sauvegarder toutes les informations (plans, formulaires de notification, etc.) ;
- automatiser la/les notification(s) entre les différentes parties ;
- permettre de développer une série de nouvelles fonctionnalités selon l'évolution du processus ;
- permettre d'ajouter des formats PDF (principalement) ou autres ;
- permettre l'extraction des informations sur un fichier XLS ;
- coordonner le processus du flux d'informations ;
- permettre l'ajout du site sur une carte ;
- l'outil logiciel doit être accessible via l'internet.

6. Couverture indoor en fonction de la technologie

En fonction de l'évolution de la technologie, les installations intérieures devront également être adaptées. Pour la 5G, il est toutefois trop tôt pour prévoir d'ores et déjà des mesures concrètes. Pour la 5G, l'on utilisera des fréquences supplémentaires sur la bande 3,6 GHz, mais surtout des fréquences au-dessus de 20 GHz.

Une révision des recommandations techniques en fonction des développements technologiques est prévue à l'avenir.

7. Entrepreneurs DAS

Le maître d'ouvrage fait en général appel à un entrepreneur DAS. Cette partie est généralement chargée de l'élaboration et de la construction du DAS. Il existe plusieurs sociétés sur le marché spécialisées dans ce domaine.

L'IBPT est un organisme indépendant et, pour des raisons de neutralité, ne publiera pas de liste d'installateurs recommandés. Des associations telles que Beltug, Agoria, Fedelec, etc. sont libres de conseiller leurs membres à ce sujet.

8. Suite des travaux

Le but est de poursuivre le processus convenu.

À cet effet, l'adresse e-mail spécifique indoorcoverage@ibpt.be continuera d'être utilisée.

Il est prévu d'évaluer la méthode de travail à l'avenir et de l'adapter si nécessaire.

9. Révision de la communication

La révision de la communication porte uniquement sur un certain nombre d'ajouts aux annexes et concerne les points suivants :

- une indication du signal d'entrée sur le design ;
- la demande au propriétaire de prévoir un tuyau d'attente (par opérateur participant au projet) pour l'installation de la transmission depuis le terrain public jusqu'au bâtiment ;
- mentionner, dans les directives de design, une largeur de bande minimale par technologie (bande 1 UMTS et bande 7 LTE) ;
- Une mise à jour de la liste des équipements comprend des types de feeder/jumper supplémentaires et des antennes pick-up.

L'annexe sera modifiée de manière dynamique à l'avenir, si nécessaire, et la nouvelle annexe sera toujours datée dans la version publiée.

10. Annexes

Vous trouverez en annexe les directives générales concernant la construction de systèmes d'antennes indoor multi-opérateurs (M-O DAS), avec en annexe :

- annexe 1 : Exigences techniques détaillées pour l'élaboration et l'installation de systèmes d'antennes indoor multi-opérateurs (M-O DAS). Ces exigences techniques sont destinées au constructeur du M-O DAS. Il s'agit généralement d'un sous-traitant spécialisé.
- annexe 2 : Liste des équipements techniques. Cette liste contient des références au matériel technique utilisé par les opérateurs mobiles pour les systèmes DAS. Cette liste est indicative mais n'exclut pas qu'un maître d'ouvrage utilise des composantes équivalentes.
- annexe 3 : Procédure PIM et VSWR. Ce document contient la méthode de mesure de l'intermodulation (PIM) et les paramètres de connexion (VSWR) du système d'antennes distribué sur le réseau de l'opérateur.
- annexe 4 : Formulaire de demande.
- annexe 5 : Modèle de rapport PIM et VSWR.

Axel Desmedt
Membre du Conseil

Jack Hamande
Membre du Conseil

Luc Vanfleteren
Membre du Conseil

Michel Van Bellinghen
Président du Conseil

GENERAL GUIDELINES

ON THE CONSTRUCTION OF

MULTI-OPERATOR DISTRIBUTED ANTENNA

SYSTEM (M-O DAS)

IN BELGIUM

A good indoor coverage of mobile services in buildings is crucial for a modern business environment and contributes to the efficiency of enterprises. A joint initiative of mobile operators, the BIPT and BELTUG has led to the development of these guidelines to help construction and real estate companies to plan and build qualitative multi-operators indoor radio infrastructures.

Version of the document: FINAL v2

Date: 06 September 2017

Table of Content

- 1. INTRODUCTION3
- 2. M-O DAS DESCRIPTION4
- 3. DESCRIPTION OF THE WORKFLOW5
 - 3.1. Conceptual pre-design Phase5
 - 3.1.1. DAS connectivity request (step 1).....6
 - Overall pre-design requirements7
 - One-line drawing.....8
 - Implementation plan9
 - Mobile operator response9
 - 3.1.2. Building owner decision (step 2 & 3)..... 10
 - 3.2. Execution Phase 10
 - 3.2.1. Building and health permits..... 12
 - 3.2.2. Repartition of the responsibilities..... 13
 - Mobile operators 13
 - Building/DAS owner (and/or its delegate)..... 13
 - 3.2.3. Provisioning of the technical room(s) 14
 - Access to the technical rooms 14
 - Surface on ground 15
 - Load on floor 15
 - Equipment room(s) environmental characteristics 15
 - Power connection & grounding at equipment locations 16
 - Transmission..... 16
 - 3.3. Operation Phase 16
 - 3.3.1. Maintenance of an existing M-O DAS..... 16
 - Building/DAS owner 17
 - Mobile operators 17
 - 3.3.2. Change requests impacting an existing M-O DAS..... 18
- 4. COST REPARTITION 18
 - Building/DAS owner 18
 - Mobile operators 18
- 5. CONTACT POINT (NOTIFICATION PROCESS)..... 19
 - Abbreviations..... 20
- ANNEXES 21

1. INTRODUCTION

These general guidelines are addressed to the owner of a Multi- Operator Distributed Antenna System ('M-O DAS owner'). In many cases the owner of the M-O DAS will also be the owner of the building ('building owner').

This document provides guidelines with regard to the design, construction and maintenance of an M-O DAS. The overall aim is to ensure that the M-O DAS will deliver good indoor mobile coverage for end-users situated in the building. It defines the responsibilities of the different parties during the whole process of design, construction and operation of the M-O DAS.

This covers the following 3 main phases:

1. Conceptual Pre-Design Phase	2. Execution Phase	3. Operation Phase
<ul style="list-style-type: none">In this phase the building is not yet constructed or needs to be structurally renovated. If the building already exist, one may directly proceed to the next phase : the Execution phase.The party in charge of the design will contact mobile operators to see if they would be interested to join the M-O DAS project.Based on the input received from operators the building owner will decide to build or not an M-O DAS.If the decision is positive, a final design will be established and the tender process for a DAS contractor will start.	<ul style="list-style-type: none">In this phase, the building structure with walls and windows already exist.The building owner has taken the decision to construct a M-O DAS and a DAS contractor has been selected to perform the work.The building/DAS owner will remain the main contact point for mobile operators. When operators agree to be part of the project, a contract will be signed between them and the building/DAS owner.The DAS contractor will construct the M-O DAS in compliance with the detailed technical requirements (see annex 1) and regulation.Mobile operators will validate the M-O DAS and will be responsible for the installation of their active equipment and the outside connectivity.	<ul style="list-style-type: none">The building/DAS owner will remain responsible for the proper functioning of the M-O DAS during its whole lifetime.The building/DAS owner will ensure the maintenance of the system and will modify/adapt the system when needed.Mobile operators will be responsible for the proper functioning and maintenance of their active equipment and for the outside connectivity.

Figure 1: overall overview of the M-O DAS phases

In the section 3 of this document we will go through the 3 phases as described in the scheme above and we will provide a description of the overall workflow and responsibilities of the different parties.

- The **Execution phase** is described in many details in the 'detailed technical requirements' (see annex 1) and aim at providing technical guidance to the party which will be in charge of the design and construction of the M-O DAS.

These general guidelines are not binding and have no contractual value. The mobile operators do however highly encourage M-O DAS owners to take them into account when they plan to invest in an M-O DAS.

At some stage in the process of construction of the M-O DAS, a separate commercial contract will need to be signed between the M-O DAS owner and each operator that will ultimately agree to connect their mobile network to the M-O DAS.

Mobile operators have drafted these guidelines with utmost care. However, they cannot be considered as liable for any fault or inaccuracies contained in these documents. Any party which would carry out works based on these guidelines and/or the detailed technical requirements in annex would ultimately be responsible for both the works and the possible construction errors. In case of questions or doubts on the contents of these guidelines the reader is invited to take contact with the operators for clarification.

Operators will ensure the regular update of these general guidelines and the detailed technical requirements annex.

2. M-O DAS DESCRIPTION


A Multi-Operator Distributed Antenna System (M-O DAS), is a passive network which aims to ensure a correct distribution of radio signal strengths of all connected mobile network operators on all desired areas of a building (i.e. office space, warehouse, underground parking, meeting rooms, elevators...). Such system is not to be confused with active antenna-systems (such as femtocells) which are not in the scope of the present guidelines.

ASTRID (the national security telecommunication network) is not included in scope in these guidelines.

An M-O DAS must be designed in such a way that it will be able to accommodate the mobile network operators at any moment in time. Doing so in this stage generates negligible additional cost and will save significant cost in comparison to adapting an existing MO-DAS afterwards. Operators are indeed free to connect to the M-O DAS as from the moment it is constructed or could also decide to connect to it at a later stage (several months or even years after the M-O DAS has been installed). The objective is to provide guidelines for the construction of an M-O DAS that will provide all the flexibility to accommodate any mobile operator at any time.

The active network elements provided and operated by mobile network operators are typically located in a dedicated technical room inside the building (see section 3.2.2. on the provisioning of technical rooms).

The M-O DAS can potentially support all current mobile technologies (namely GSM, EDGE, UMTS, HSPA, LTE, LTE advanced) on all supported licensed frequency bands (700, 800, 900, 1800, 2100, 2600 MHz).

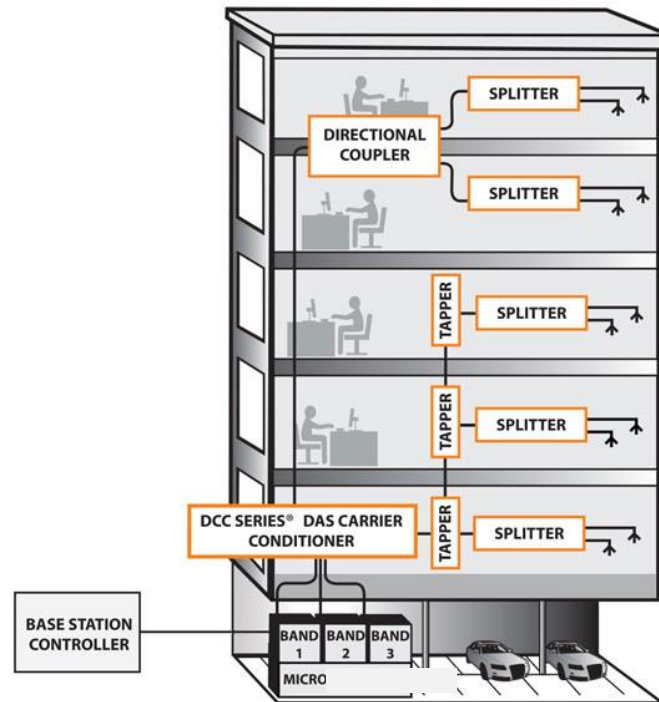

[Figure 2: example scheme of a typical DAS](#)

3. DESCRIPTION OF THE WORKFLOW

For mobile operators, the only official point of contact will be the M-O DAS owner with which it has signed a contract.

The M-O DAS owner may delegate the construction of the M-O DAS to a contractor which he has chosen to work with. The DAS contractor should have the necessary technical skills to perform the work and should commit itself to respect the processes and detailed technical requirements as described in detail in annex 1. Operators will not interfere in the contractual relationship between the M-O DAS owner/contractor.

In the processes below we describe the workflow and responsibilities of the mobile network operators on one side and of the M-O DAS owner/contractor on the other side.

3.1. Conceptual pre-design Phase

This Conceptual Pre-Design Phase is normally applicable when the building is not yet constructed (building is in a project phase and exist only on paper) or when the building will be structurally renovated.

Eventually the actions described in this Phase might be applied for existing buildings too in case building owners want to have a first high level idea of project impact and cost before starting a real M-O DAS project. Actions described and documents/input

required to provide to mobile operators via the Notification tool of BIPT remain the same.

If the building is already constructed or does not necessitates a structural renovation or a first high level impact analysis is not required, one may then proceed directly towards the Execution Phase. This later sub-process flow is also the one that will be relevant for the DAS contractor as soon as it will be selected by the M-O DAS owner.

In an early Conceptual Pre-Design phase, the party in charge of the design of the new building or renovation of the building will need to interact with mobile network operators (through the notification process) in order to:

- make a first conceptual evaluation of the technical feasibility of a M-O DAS
- explore operators' interest in sharing the DAS
- get a first rough M-O DAS and mobile operators cost estimation

It is of upmost importance that mobile operators are contacted and included in the process as soon as possible so that they can evaluate their interest to be part of the project.

The Conceptual Pre-Design Phase can be summarized as follows:

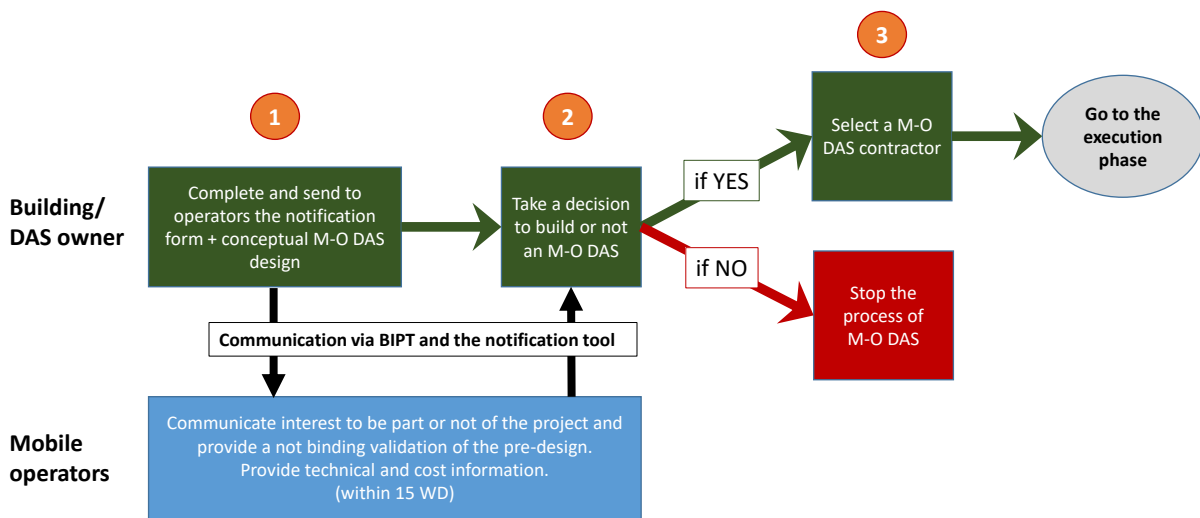


Figure 3: M-O DAS conceptual pre-design process flow

We present below one-by-one all the steps in detail (step 1 → step 3).

3.1.1. DAS connectivity request (step 1)

The building owner (or its duly representative) completes and sends the notification form (see annex 2) together with a conceptual M-O DAS pre-design to the mobile operators using the notification-tool.

The design requirements and all the documents required with the design as mentioned below will have also to be provided with possible modifications in step 4 too (see the detailed technical requirements in annex of this document).

Overall pre-design requirements

The conceptual M-O DAS pre-design will include:

- Plans of the building to be covered
- Expected capacity needs per floor/area (number of people and type of activity)
- Implementation plan of the existing and new or renovated installation, indicating the floor space dedicated to the transmission room, M-O DAS technical rooms for the active radio equipment, location of the antennas, location of the tappers, splitters, combiners....
- One-line scheme of the installation including the needed input level per technology to meet the baseline thresholds below

A building should be covered independently from the outdoor coverage. In case of existing indoor coverage provided from outdoor, it is necessary to have a significantly stronger indoor signal. The indoor signal level should always be at least 10 dB higher than the outdoor signal in order to avoid interference in urban environment (6dB for rural or suburban environment). In case of repeater the serving indoor signal level must be 10dB higher than the best neighbour signals.

The acceptance for construction phase will be based on the below mentioned requirements. Baseline thresholds for indoor coverage acceptance are:

- 2G: Indoor BCCH signal level -85 dBm (@ 95%).
- 3G: Indoor RSCP signal level -90 dBm (@ 95%) + (5MHz bandwidth UMTS Band I).
- LTE: Indoor RSRP signal level -95 dBm (@ 95%) + (20MHz bandwidth LTE band 7).

In some cases this difference in level does not need to be this level, but it will always be verified /confirmed by means of the final integration walk test.

The DAS contractor should minimize indoor signal leakage outside the building to avoid an impact on macro sites. Signal leakage to outdoor environment should be 15 dB lower than the dominant cell. In case outdoor signal levels are below -100dBm, signal levels measured outside are allowed to be -100dBm as well.

Those considerations are important as they will prevent as much as possible interference, handover and quality problems for end-users.

The design needs to be compliant with the applicable regulation for electromagnetic emission and urbanism. In Belgium, regulation is different in the 3 regions (see below point f).

Drawings and schemes of the design need to be provided in pdf format. They shall also contain a clear legend explaining the different symbols used.

The DAS contractor should ideally foresee the implementation of both repeaters and base station solutions in its design. In case repeaters would be used, the design should mention the pickup antennas positions and the positions of the cables between the pickup antennas and the repeaters.

One-line drawing

This is a drawing identifying radio, cables, splitters, connectors, attenuators, antennas, and how they are connected. It contains indications such as the type of cables, cable lengths, type of antennas, splitters... and includes a list of all materials that will be used.

Other elements that are relevant for the analysis of the radio engineer of each operator may be added to this drawing such as the cable attenuation per frequency.

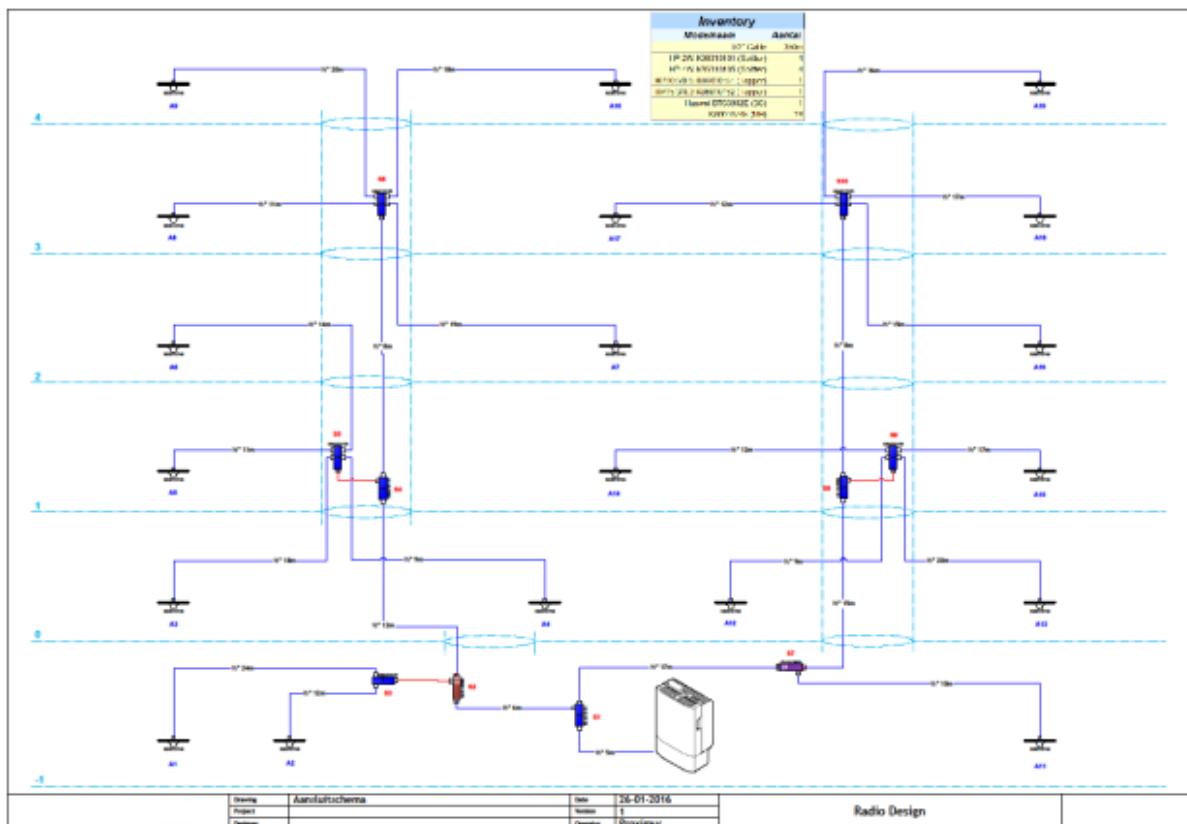


Figure 4: example of one-line drawing

Implementation plan

The implementation plan is a set of floor plans (one for each floor) which shows the location of the antennas, technical rooms, transmission room and the cable paths and the connections to other floors (vertical technical shafts) as shown in the example hereunder.



Figure 5: example of implementation plan

Mobile operator response

Based on all the information provided, mobile operators will communicate within 15 working days (starting upon reception of all complete and correct documents and information) if they are interested or not to be part of the project and will provide a not binding validation of the conceptual pre-design. The operator will also provide technical input to the building owner allowing him to make the complete the design and high-level cost estimation of the full M-O DAS project.

Information required from operators are:

- Power consumption
- Cooling needs
- Cabling requests (between technical and transmission rooms)
- Cost estimation of operator-related elements for the project (transmission and active radio equipment)

- Zone type of the building (rural, sub-urban, urban) to determine required indoor signal level for the design.

This information should allow the building/DAS owner to make a reliable project evaluation and help him in making the decision if an M-O DAS is feasible or not.

At this very early stage the answer provided by the operator may not yet be considered as final. **It is only at a later stage in the process, when operators will proceed with the validation of the final RF design (see step 6), that they will communicate their final decision and depending on this decision sign a contract with the building owner for the connection of their equipment to the M-O DAS. Up until then, operators have the opportunity to withdraw from the project at no cost.**

Even though an operator may decide not to connect to the DAS in a first stage, the indoor installation will always be designed in such a way that it will be able to accommodate all operators at any moment in time.

3.1.2. Building owner decision (step 2 & 3)

Based on the info obtained from the operators, the building owner will then decide whether or not to integrate the construction of an M-O DAS in its final building project.

Depending on its decision the building owner will then:

- Either stop the process of M-O DAS. The building owner may then for example decide to go further with only one operator or could decide to completely stop the project of having a mobile indoor system.
- Or select an M-O DAS contractor and proceed towards the Execution Phase (step 4).

3.2. Execution Phase

This phase can only start when the building is sufficiently advanced to plan the first site visit (internal walls, windows, doors are built). At this stage, the building owner should have selected a DAS contractor which will be responsible for the construction of the M-O DAS installation.

During the execution phase, the building owner/DAS contractor together with the operators will go through the different steps as described in the process flow below with the aim to build an M-O DAS to which operators will connect their equipment.

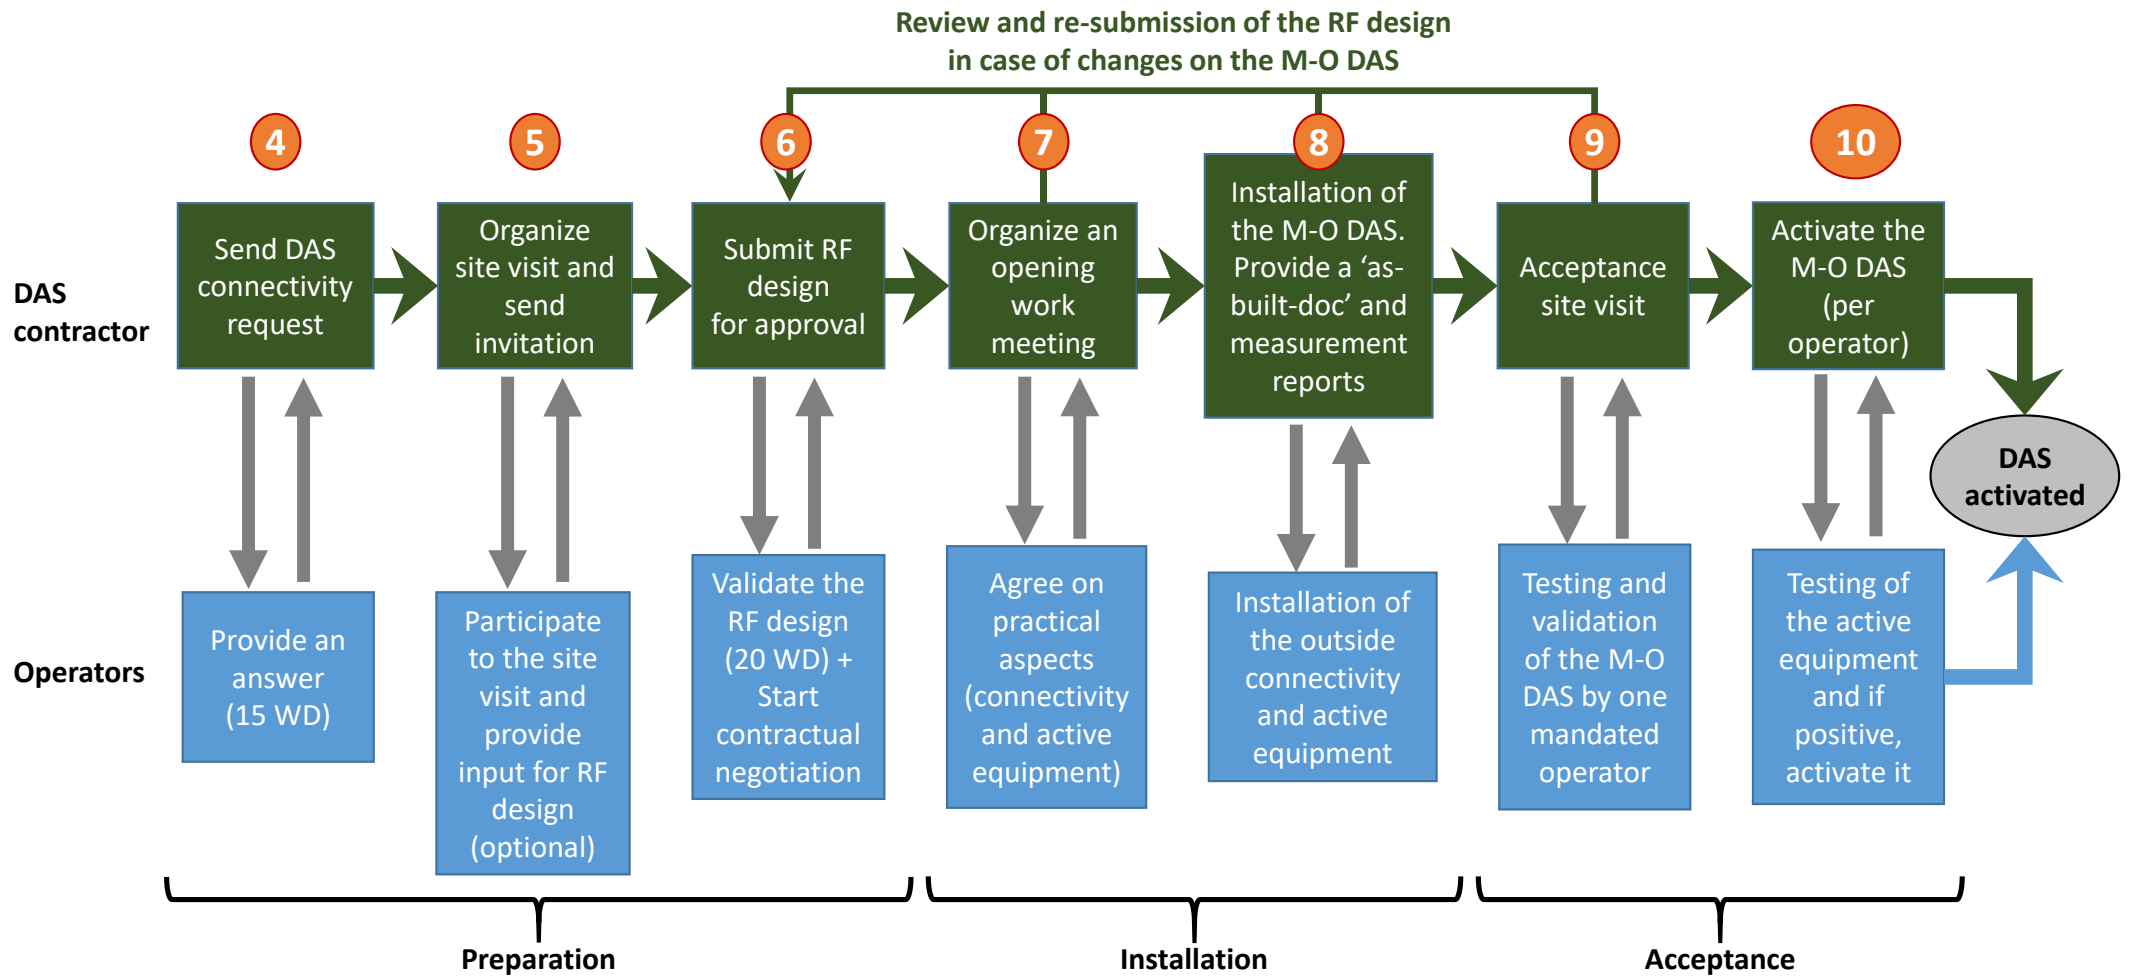


Figure 7: M-O DAS Execution process flow

Detailed technical requirements are annexed to the present general guidelines (see annex 1). Those requirements are addressed to the Consulting Engineering Company and the M-O DAS contractor that has been hired by the M-O DAS owner to design and install an M-O DAS that will be operational and ready to connect with the mobile operator's network. They provide a full overview of the processes to be followed with all steps (from step 4 to step 10) explained in detail and a minimum set of basic technical requirements.

These processes and requirements are inspired from existing best practices and processes based on the experience of mobile network operators for the design and installation of M-O DAS.

It is highly recommended to use the detailed technical guidelines (annex 1) as a reference for the selection of the M-O DAS contractor and to include them in the contract with the company that will be in charge of the installation of the M-O DAS.

This will ensure that the M-O DAS will meet all the technical, regulatory and quality requirements. Operators will only be able to connect their active radio equipment to the M-O DAS if all the processes and requirements are correctly respected.

3.2.1. Building and health permits

The DAS owner/contractor must ensure that the indoor installation is fully compliant with the applicable regulations concerning building permit and electromagnetic emission norms. In Belgium, regulations are different in the 3 regions.

If needed by the applicable regional regulation, a building permit is to be introduced by the building/DAS owner only if the M-O DAS RF design foresees the installation of a pick-up antenna on the roof.

Taking into account the important administrative burden of having to prepare a health permit and the related cost that would have to be supported by the DAS owner, operators strongly recommend that the design would be done in such a way that the M-O DAS would remain below applicable health norms in all places, floors and so that there would be no need to introduce a health permit (see the detailed technical requirements for more details about the applicable permit thresholds). This is also the best way to ensure that the effective indoor installation will be fully in line with applicable health norms.

If a health permit would nevertheless need to be introduced, it will be handled by each concerned operator based on information that has to be provided by the DAS owner/contractor.

Mobile operators will inform the building/DAS owner duly in time in case of a modification/strengthening of the applicable health regulation. The building/DAS owner will then have a legally pre-defined period to modify its M-O DAS according to the new applicable norms.

In case the activated M-O DAS would not comply with applicable health norms, the building/DAS owner will have 24 hours to modify the M-O DAS. If this would not happen, operators will be authorized to lower the power or to de-activate their equipment.

In case of fines due to health norms infringements, operators will also be authorized to pass them on to the building/DAS owner.

3.2.2. Repartition of the responsibilities

Below you will find a short overview of the respective responsibilities of the mobile operators and the building/DAS owner during the whole execution phase of the M-O DAS.

Mobile operators

1. Provide an answer to the DAS connectivity / notification request (15WD)
2. Participate to the initial site survey (optional)
3. Validate the RF detailed design
4. Participate to work meetings organized by the building owner (e.g. to determine all needed cabling, power & cooling details, etc.)
5. In case of need, introduce a health permit
6. Draft an offer & contractual agreement to be submitted to the building owner
7. Participate to the M-O DAS acceptance site visit (testing and validation of the M-O DAS)
8. Ensure the installation, operation and maintenance of the active radio equipment (including connection to the DAS and to the transmission lines)
9. Draft and submit mandatory files to administrations (e.g. health files)

Building/DAS owner (and/or its delegate)

1. Ensure the overall project management and coordination (prepare site survey, design, as-built plan and organize work meetings when needed...).
2. Establish and follow-up of the contract with the DAS contractor.
3. Ensure that the installation of the M-O DAS occurs according to the 'detailed technical requirements' (see annex 1)
4. Ensure that the M-O DAS is fully in line with applicable health norms regulation (different in the 3 regions)

5. Introduce a building permit in case a pick-up antenna is foreseen (different in the 3 regions)
6. Follow-up of the contract with mobile operators having decided to connect to the M-O DAS.
7. Provide the needed access rights to the building for the DAS contractor
8. Provide the needed access rights to the building and technical room(s) for mobile operators (or mobile operator's subcontractor)
9. Ensure the availability of cabling in the building according to the specifications of the operators.
10. Provide technical room(s) which are fully equipped (power, cooling, etc.) to host the active radio equipment of each operator.
11. Ensure the proper maintenance and repair of the M-O DAS during its whole life time.

3.2.3. Provisioning of the technical room(s)

All details related to this topic are linked to the type of active equipment an operator will install. This is always depending on the design made by the Consulting Engineering Company and/or the DAS contractor. During the validation of the design or later on in the process during the opening works meeting (step 7) all related info will be provided towards the building owner.

One or more technical rooms must be foreseen by the building/DAS owner to host active radio equipment owned and operated by each mobile operator. Different types of technical rooms can be foreseen depending on the building size and RF design and configuration.

- **The main equipment room** is the room where the mobile operator's main equipment will be installed (i.e. BTS, repeater...).
- **The remote equipment room** host additional mobile operator's equipment (i.e. remote radio heads,...).
- **The transmission room** is the room where the operator will enter with the transmission cable from outside the building.

For smaller buildings all this various types of technical rooms could be regrouped in one single technical room.

Access to the technical rooms

Access to the technical room(s) must be guaranteed to the mobile operators during the installation phase and afterwards during the whole lifetime of the M-O DAS. Entrance to the room(s) will be reserved only to authorized and skilled people and measures must be taken to prevent any unauthorized access to these room(s). Access to the technical room(s) can be granted by operators on demand. Operators shall warn the building/DAS owner upfront in case of on-site interventions and shall make

sure that the building/DAS owner can clearly link the identity of the technician with the concerned operator company that will do the intervention.

The building owner will be responsible for the implementation of all adequate logistic and security measures in relation with the technical rooms. Such implementation can be performed by the DAS contractor (in which case the listed specifications below should be included in the DAS contractor contract) or another third party. These requirements will be discussed and agreed in detail during the opening work meeting before the construction phase. Some rules of thumb can be found below.

Surface on ground

For a medium indoor coverage project (of 30 to 40 indoor antennas) each mobile operator will need a floor space for 2 radio cabinets and 1 supporting cabinet for the powering and backhauling. Minimum surface on ground for housing the cabinets is 4 m² per operator. Additional space in the equipment room can be needed, depending on the telecom equipment choice. Additional space can also be needed for housing remote equipment, depending on the building configuration.

Load on floor

Load on floor: 750 kg/m² for telecom and supporting equipment. The deviation in planarity of the floor will not exceed 5 mm per meter. Floor surface has to be clean, dry and free from obstacles.

Equipment room(s) environmental characteristics

The technical room(s) of each mobile operator is located as close as possible from the common DAS connection point (for aim of equal cable losses). The building owner is responsible to set up and maintain a cooling system to create the right environmental conditions for the technical room. Mobile operators will deliver the heat load data for the installed telecom equipment during the opening work meeting (step 7).

- **The main equipment room** is the room where the mobile operator's main equipment will be installed (i.e. BTS, repeater...). Free useable height of the room $\geq 2,5$ meters. Environmental conditions inside the room are compliant with ETSI standard ETS 300 019-1-3 class 3.1: Temperature controlled locations. 99% of time the temperature will be between +5°C and +40°C, 99% of time the relative humidity will be between 5 and 85%. Minor presence of sand and dust, not situated in proximity to sources of sand or dust. With insignificant vibration or shock, not subjected to water, condensed water or icing. Without particular risks of biological attacks (clean location where there is no molding (fungus) or attack by animals).
- **The remote equipment room** host additional mobile operator's equipment (i.e. remote radio heads,...). Free usable height of the room ≥ 2 meters. Environmental conditions at the remote location are compliant

with ETSI standard ETS 300 019-1-3 class 3.3: not temperature controlled locations.

Power connection & grounding at equipment locations

Each mobile operator will have access to individual electrical power connection:

- AC power connection for the Technical room: 3 x 400V +N _ 20 Ampère is preferred (other power connection to be discussed when applicable)
- AC power connection for remote location: 1 x 230V +N _ 20 Ampère is preferred (other power connection to be discussed when applicable)
- 10 Ohm electrical grounding point
- Equipotential connection between all grounding points used in the DAS

Transmission

Each operator will provide the needed connectivity from outside the building up to the transmission room via a tube foreseen by Das contractor. The connectivity cabling will be provided and installed by operators. The DAS contractor will have to foresee a tube/subduct (HDPE 50mm) for each operator in the project, between private property (building intro) and public domain + along the route, every 50m and for every direction change, a waiting pit needs to be foreseen. The building/DAS owner is responsible for the placement of a tube that will be adequate internal cabling inside the building from the transmission room to the equipment room (in case these rooms are distinct).

The radio interface with the M-O DAS must be made available within the technical room.

In some cases, the active radio equipment of the mobile operators will require an external antenna (i.e. use of repeater); in such case, enough space on the roof or on external walls must be planned for the external antenna.

3.3. Operation Phase

3.3.1. Maintenance of an existing M-O DAS

In order to maintain a good quality of experience for end-users inside but also outside the building (as the indoor coverage installation may interfere with the outdoor mobile network), it is essential that the building owner foresees proper maintenance of the M-O DAS and ensures that there is no deterioration of the quality of the mobile networks connected to the DAS.

On the other hand, each operator will remain fully responsible for the proper functioning and maintenance of their respective active radio equipment and for the outside connectivity.

Below you will find a short description of the responsibilities of the DAS owner and of the operators in respect with the maintenance of an existing M-O DAS.

Building/DAS owner

The DAS owner will be responsible for the operation and the maintenance of the DAS during its whole lifetime. This task can be delegated to a 'DAS maintenance company' which could be the DAS contractor itself or any other third party contracted by the DAS owner to ensure the maintenance of the M-O DAS.

In case of observed quality issues or technical problems (including problems of power supply, electromagnetic emission issues, etc.), operators may, at any time, ask to the DAS owner to modify the design of an activated M-O DAS upon guidance of the impacted operator.

The DAS owner provides the coordinates of a point of contact that can be reached in case a maintenance problem would occur.

In case the DAS owner is planning to do an intervention on the M-O DAS, power supply or any other intervention that might fully or partially impact indoor mobile services, the DAS owner (or its delegate) will inform the concerned operator 10 working days before the planned intervention/outage date.

For any intervention of an operator – planned or not – and if the root-cause of the intervention is not under the responsibility of the operator, then the operator will charge the building owner for all costs incurred.

All possible changes and/or extensions of the M-O DAS due to e.g. to the inclusions of additional coverage areas and/or the increase in capacity needs will fall under the responsibility of the DAS owner.

Mobile operators

Each operator will be responsible for the proper functioning and maintenance of their respective active radio equipment (repeaters and base stations) and for the connectivity that has been provided from outside the building towards the technical room inside the building. Operators will also support all the costs related to their own active radio equipment.

In case an electromagnetic emission health issues would arise, operators will be responsible for the handling of the complaints and all related administrative tasks. However it would be the responsibility of the DAS owner to solve the identified problem if it is caused by the M-O DAS. The building/DAS owner will have 24 hours to modify the M-O DAS. If this would not happen, operators will be authorized to lower the power or to de-activate their equipment.

In case of fines due to health norms infringements, operators will also be authorized to pass them on to the building/DAS owner.

If the service of one operator is down or if after investigation it appears that a detected problem is linked to the radio equipment of an operator (or more operators) then the maintenance and the repair will be carried out by the concerned operator(s).

3.3.2. Change requests impacting an existing M-O DAS

Following the construction of an M-O DAS, different types of change requests could be introduced to the existing M-O DAS. For example an additional operator could request to join an existing M-O DAS. It could also be needed to proceed with the extension or the reduction of an existing M-O DAS. At last, there could be a request to dismantle an indoor installation.

Mobile operators will inform the building/DAS owner duly in time in case of a modification/strengthening of the applicable health regulation. The building/DAS owner will then have a legally pre-defined period to modify its M-O DAS according to the new applicable norms. If this would not happen, operators will be authorized to de-activate their equipment.

In case of fines due to health norms infringements, operators will also be authorized to pass them on to the building/DAS owner.

These processes are described in the detailed technical requirements (see annex 1).

4. COST REPARTITION

Building/DAS owner

The building/DAS owner will support all costs related to the design, construction, maintenance and modification of its M-O DAS, except for the costs that are explicitly identified and attributed to mobile operators (see next sub-section).

Mobile operators

Without prejudice to what would be contractually negotiated by each individual operator with the building/DAS owner, operators will only take at their charge one final validation of the RF design (step 9 of the 'Execution Phase'). In case additional validations would be requested, they will then be charged to the building/DAS owner.

The costs related to the installation and use of operators' active equipment and of the outside connectivity will be part of the contract signed with the building/DAS owner. The usage fee that will be foreseen for the equipment and connectivity usually include all maintenance and repair costs.

5. CONTACT POINT (NOTIFICATION PROCESS)

BIPT

Gino Ducheyne

Phone number: 032 2 226 88 18

Email: gino.ducheyne@bipt.be

Project email: indoorcoverage@bipt.be

Abbreviations

BTS:	Base Transmission Station
RF:	Radio frequency
M-O DAS:	Multi-Operators Distributed Antenna system
MH:	Mexican Hat
MNO:	Mobile Network Operator
EP:	Environmental Permit
VSWR:	Voltage Standing Wave Ratio
EIRP:	Equivalent Isotropically Radiated Power
PIM:	Passive Intermodulation Measurement

ANNEXES

Annex 1

Detailed Technical Requirements for the installation of multi-operators mobile indoor Distributed Antenna System (M-O DAS)

*For the Consulting Engineering Company
and/or the DAS contractor*

Table of Contents

- 1. INTRODUCTION.....3
- 2. M-O DAS DESCRIPTION.....4
- 3. PROCESS DESCRIPTION.....5
 - 3.1. DAS connectivity request – Step 4.....7
 - 3.2. First site visit (optional for operators) – Step 5.....7
 - 3.3. RF Detailed Design – Step 6.....8
 - 3.3.1. Tasks of the DAS owner/DAS contractor8
 - 3.3.2. Tasks of the mobile operators 14
 - 3.4. Opening works meeting – Step 7..... 15
 - 3.5. Installation of the M-O DAS – Step 8 15
 - 3.6. Acceptance site visit – Step 9..... 17
 - 3.7. Activation of the M-O DAS – Step 10..... 18
- 4. CHANGE REQUESTS IMPACTING AN EXISTING M-O DAS..... 19
 - 4.1. Additional operator on an existing M-O DAS 19
 - 4.2. An operator decides to quit the M-O DAS..... 20
 - 4.3. M-O DAS modification..... 20
 - 4.4. Full dismantling of an existing M-O DAS..... 20

1. INTRODUCTION

This document is addressed to the party that will be in charge of the design and construction of a Multi-Operator Distributed Antenna System (we will call this party, the DAS contractor).

Mobile operators recommend to insert this document in annex to the contract signed between the building/DAS owner (or a duly representative of the building owner which can be for example a tenant) and the DAS contractor. By including these detailed technical requirements to the contract, the DAS contractor agrees to comply with the set of formalized processes and requirements.

The overall M-O DAS process may include the 3 following main phases.

- The **Conceptual Pre-Design Phase** is only applicable in situation where the building is not yet constructed or needs to be structurally renovated.
- The **Execution Phase** starts when the building structure is in place with wall and windows and provides technical guidance to the DAS contractor for the design and construction of an M-O DAS.
- At last, the **Operation Phase** refers to everything which needs to be done to ensure the proper maintenance of an existing M-O DAS. This phase could also be of interest for the DAS contractor if this party would also be in charge of the maintenance of the M-O DAS after its construction.

1. Conceptual Pre-Design Phase	2. Execution Phase	3. Operation Phase
<ul style="list-style-type: none"> • In this phase the building is not yet constructed or needs to be structurally renovated. If the building already exist, one may directly proceed to the next phase : the Execution phase. • The party in charge of the design will contact mobile operators to see if they would be interested to join the M-O DAS project. • Based on the input received from operators the building owner will decide to build or not an M-O DAS. • If the decision is positive, a final design will be established and the tender process for a DAS contractor will start. 	<ul style="list-style-type: none"> • In this phase, the building structure with walls and windows already exist. • The building owner has taken the decision to construct a M-O DAS and a DAS contractor has been selected to perform the work. • The building/DAS owner will remain the main contact point for mobile operators. When operators agree to be part of the project, a contract will be signed between them and the building/DAS owner. • The DAS contractor will construct the M-O DAS in compliance with the detailed technical requirements (see annex 1) and regulation. • Mobile operators will validate the M-O DAS and will be responsible for the installation of their active equipment and the outside connectivity. 	<ul style="list-style-type: none"> • The building/DAS owner will remain responsible for the proper functioning of the M-O DAS during its whole lifetime. • The building/DAS owner will ensure the maintenance of the system and will modify/adapt the system when needed. • Mobile operators will be responsible for the proper functioning and maintenance of their active equipment and for the outside connectivity.

Figure 1: overall overview of the M-O DAS phases

This document will only cover the Execution Phase and the Operation Phase.

The detailed technical requirements provide a detailed overview of the processes and define a minimum set of basic technical requirements with the aim to help a DAS contractor to design and install an indoor Multi-Operators Distributed Antenna System (M-O DAS) that will be operational and ready to connect with mobile operator networks.

These processes and requirements are inspired by existing best practices and processes based on the experience of mobile network operators for the design and installation of M-O DAS.

2. M-O DAS DESCRIPTION

A Multi-Operator Distributed Antenna System (M-O DAS), is a passive network which aims to ensure a correct distribution of radio signal strengths of all connected mobile network operators on all desired areas of a building (i.e. office space, warehouse, underground parking place, elevators...). Such system is not to be confused with active antenna-systems (such as femtocells) which are not in the scope of the present guidelines.

ASTRID (the national security telecommunication network) is not included in scope in these guidelines.

An M-O DAS must be designed in such a way that it will be able to accommodate the mobile network operators at any moment in time. Doing so in this stage generates negligible additional costs and will save costs in comparison to adapting an existing MO-DAS afterwards. Operators are indeed free to connect to the M-O DAS as from the moment it is constructed or could also decide to connect to it at a later stage (several months or even years after the M-O DAS has been installed). The objective is to provide guidelines for the construction of an M-O DAS that will provide all the flexibility to accommodate any mobile operator at any time.

The active network elements provided and operated by mobile network operators are typically located in a dedicated technical room inside the building (see chapter 6 on the provisioning of technical rooms).

The M-O DAS can potentially support all current mobile technologies (namely GSM, EDGE, UMTS, HSPA, LTE, LTE advanced) on all supported licensed frequency bands (700, 800, 900, 1800, 2100, 2600 MHz).

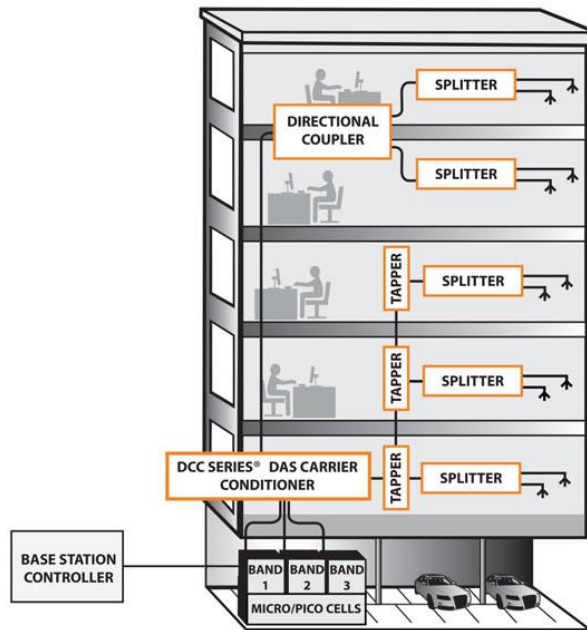


Figure 2: example scheme of a typical DAS

3. PROCESS DESCRIPTION

As already said before, these detailed technical requirements are addressed specifically to the DAS contractor that has been selected by the building/DAS owner and are focusing on the Execution Phase, which is the phase including the design, the construction and finally activation of a M-O DAS.

The Execution phase can only start when the building is sufficiently advanced to plan the first site visit (internal walls, windows, doors are built).

During the execution phase, the building owner/DAS contractor together with the operators will go through the different steps as described in the process flow below with the aim to build an M-O DAS to which operators will connect their equipment.

This will ensure that the M-O DAS will meet all the technical, regulatory and quality requirements. In particular, the M-O DAS shall be compliant with the applicable regulation for electromagnetic emission and urbanism (in Belgium, regulation is different in the 3 regions).

Operators will only be able to connect their active radio equipment to the M-O DAS if all the processes and requirements are correctly respected.

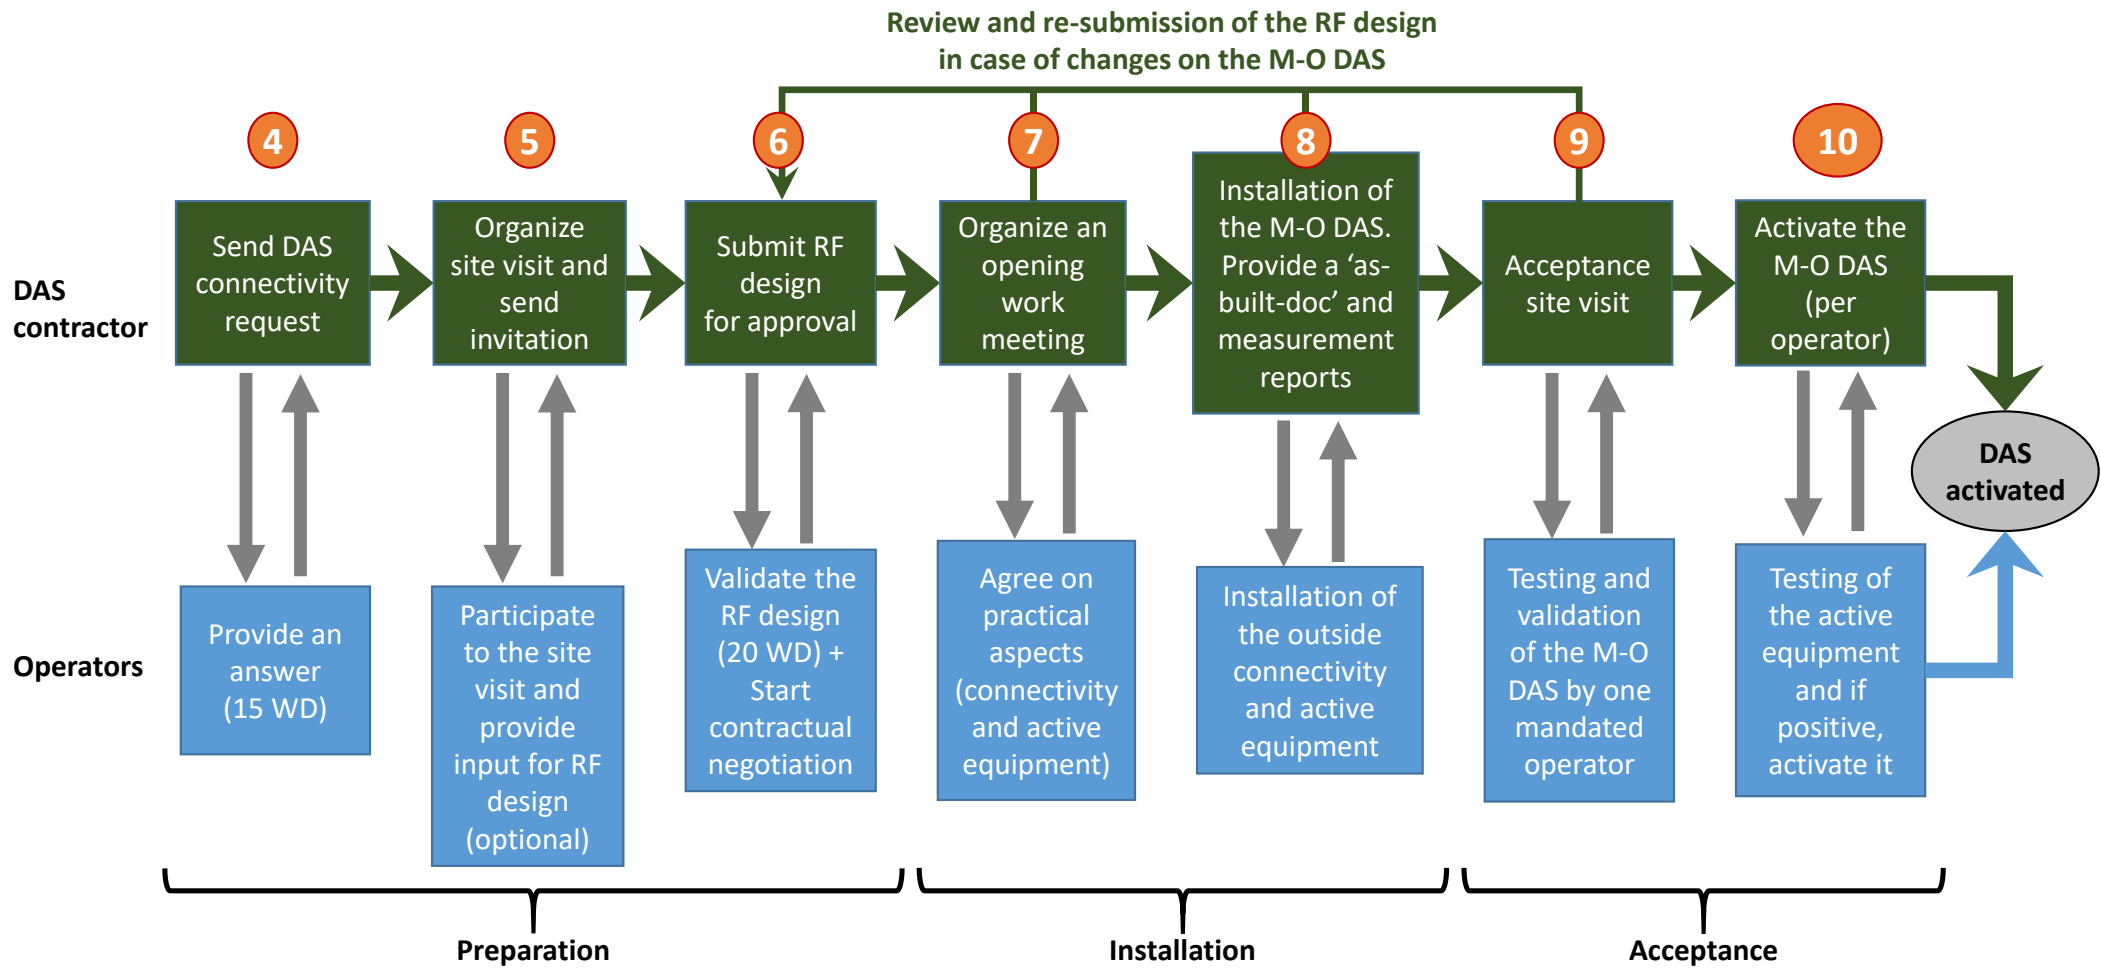


Figure 3: M-O DAS Execution process flow

3.1. DAS connectivity request – Step 4

The building/DAS owner or its delegate initiates his request to the operators to join the DAS (via the notification-tool) and includes all the requested information as already described in step 1 of the General Guidelines document.

In case a conceptual pre-design phase occurred previously, when the building/DAS owner will provide all the requested documents together with the notification form, he will either confirm or modify the building information and customer information that he already provided in Step 1. A new official request is however required as technical & commercial interests of the operators could have changed in time due to for example network evolution or churn of customers.

The operators will confirm their interest within 15 working days.

3.2. First site visit (optional for operators) – Step 5

A first site visit should be organized by the building owner/DAS contractor and an invitation will be sent via notification system to the operators.

It is up to each operator to decide on the need to participate in this site visit. The presence of the DAS contractor is mandatory for this meeting. Operators who would decide to participate to the visit will be able to provide advice to the DAS contractor based on their first assessment on the location. Such provided advice should be taken into account by the DAS contractor in the subsequent design phase.

During this visit, the objective is that the DAS contractor would collect on site all the needed information about the building(s), the propagation environment in and around the building and the usage in each zone. All this information will help him to determine exactly the coverage needs. The survey will also allow to determine the location of the technical equipment room(s), transmission rooms, the antennas, potential pick-up antenna locations, signal strengths (all operators and technologies) indoor and on the roof (for repeaters) and the cable routes. In case a pick-up antenna would be foreseen, the DAS contractor will then have to introduce a building permit (different procedure in the 3 regions).

Site visit report will be sent by the DAS contractor via the notification system to each operator (including operator that would not have participated to the visit) with the plans of the areas to be covered together with the measurement reports. Measurements reports shall include: the best server outdoor signal, indoor measurements and measurements performed on the roof of the building.

3.3. RF Detailed Design – Step 6

3.3.1. Tasks of the DAS owner/DAS contractor

a. Overall design requirements

The M-O DAS must be designed by the DAS contractor in such a way that it can accommodate the services and related frequencies of mobile network operators and can support the existing technologies (2G, 3G & 4G). As far as possible and taking into account technology evolutions, the M-O DAS should be designed in a way that it will allow upgrades and additions of future technologies according to the requirements provided by the mobile network operators (e.g. 5G).

In order to ensure a good indoor quality of experience the design needs to take into account the capacity that is expected to be needed for the specific location. Expected capacity needs will depend on the foreseen number of end-users on this location and must be conform to the frequency bands in use by the operators.

The DAS contractor will make a design based on a measurement report of the different technologies and frequencies (receiving level of the existing outdoor coverage which is measured on the different floors inside and outside the building and on the roof). This design will also contain the input level needed per technology to meet the baseline thresholds below.

A building should be covered independently from the outdoor coverage. In case of existing indoor coverage provided from outdoor, it is necessary to have a significantly stronger indoor signal. The indoor signal level should always be at least 10 dB higher than the outdoor signal in order to avoid interference in urban environment (6dB for rural or suburban environment). In case of repeater the serving indoor signal level must be 10dB higher than the best neighbour signals.

The acceptance for construction phase will be based on the below mentioned requirements. Baseline thresholds for indoor coverage acceptance are:

- 2G: Indoor BCCH signal level -85dBm (@ 95%)
- 3G: Indoor RSCP signal level -90dBm (@ 95%) + (5MHz bandwidth UMTS Band I).
- LTE: Indoor RSRP signal level -95dBm (@ 95%) + (20MHz bandwidth LTE band 7).

In some cases this difference in level does not need to be this level, but it will always be verified /confirmed by means of the final integration walk test.

The DAS contractor should minimize indoor signal leakage outside the building to avoid an impact on macro sites. Signal leakage to outdoor environment should be 15 dB lower than the dominant cell. In case outdoor signal levels are below -100dBm, signal levels measured outside are allowed to be -100dBm as well.

Those considerations are important as they will prevent as much as possible interference, handover and quality problems for end-users.

The DAS owner/contractor must ensure that the design of the indoor installation is fully compliant with the applicable regulations concerning building permit and electromagnetic emission norms. In Belgium, regulations are different in the 3 regions (see below point f).

Drawings and schemes of the design need to be provided in pdf format. They shall also contain a clear legend explaining the different symbols used.

The DAS contractor should ideally foresee the implementation of both repeaters and base station solutions in its design. In case repeaters would be used, the design should mention the pickup antennas positions and the positions of the cables between the pickup antennas and the repeaters.

b. One-line drawing

This is a drawing identifying radio, cables, splitters, connectors, attenuators, antennas, and how they are connected. It contains indications such as the type of cables, cable lengths, type of antennas, splitters... and includes a list of all materials that will be used.

Other elements that are relevant for the analysis of the radio engineer of each operator may be added to this drawing such as the cable attenuation per frequency.

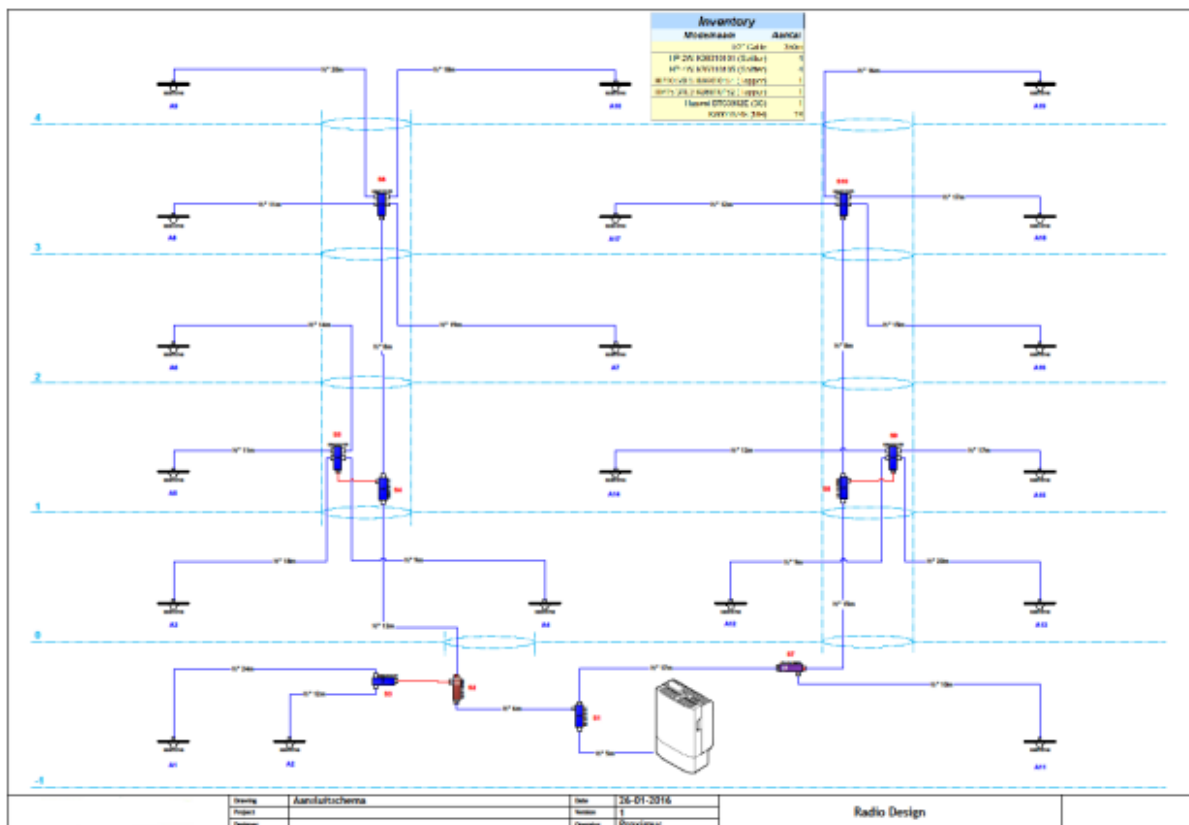


Figure 4: example of one-line drawing

c. Implementation plan

The implementation plan is a set of floor plans (one for each floor) which shows the location of the antennas, technical rooms, transmission room and the cable paths and the connections to other floors (vertical technical shafts) as shown in the example hereunder.



Figure 5: example of implementation plan

d. Signal loss calculations

For each antenna, a precise loss calculation (loss between the common entry point of all operators and each individual antenna) has to be made by the DAS contractor. This calculation will be based on coaxial cable length, coax cable type, frequency band, type of passive component (combiner, diplexer, splitter, tapper, attenuator ...) using materials from the agreed portfolio. This will allow operator(s) to determine the appropriate power to configure on its (their) active equipment(s) to comply with the health regulations (see point f).

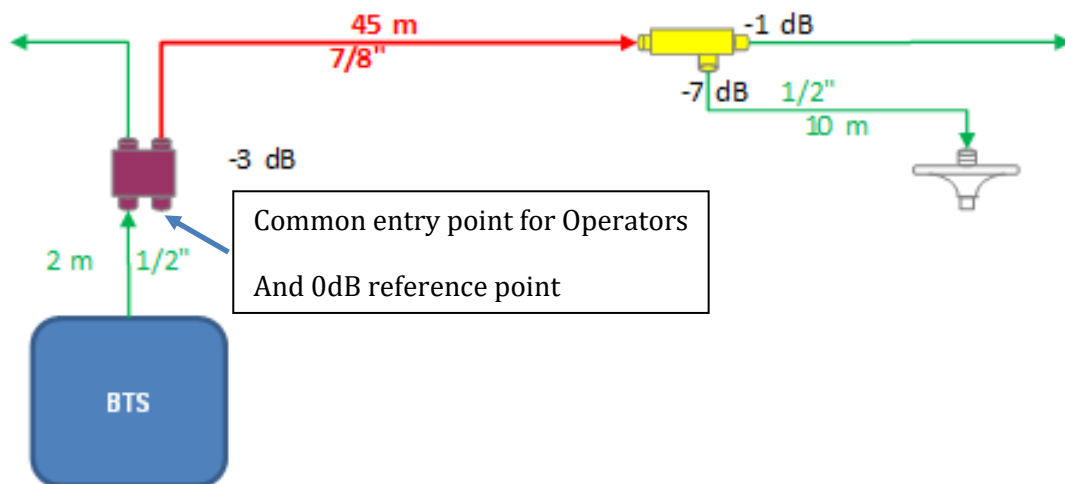


Figure 6: example of loss calculation

Loss between BTS and antenna for the 900 MHz band :

Cable loss : 45m 7/8" (3.75dB per 100m) and 12m 1/2" (7.07dB per 100m)

$$\rightarrow 45 \cdot 0.0375 + 12 \cdot 0.0707 = 1.69\text{dB} + 0.85\text{dB} = \mathbf{2.54\text{dB}}$$

Passive components loss : 3dB for the combiner, 7dB for the tapper

$$\rightarrow 3 + 7 = 10 \text{ dB}$$

Insertion loss : 2 passive components (0.2dB loss for each component)

$$\rightarrow 2 \cdot 0.2\text{dB} = 0.4 \text{ dB}$$

Total loss 900 MHz band: $2.54 + 10 + 0.4 = \mathbf{12.94 \text{ dB}}$

In the same way :

Total loss 1800 MHz band = $3.67 + 10 + 0.4 = \mathbf{14.07 \text{ dB}}$

Total loss 2100 MHz band = $\mathbf{14.37 \text{ dB}}$...

e. Other information to be provided by the DAS contractor

Together with the one-line drawing, the implementation scheme and the loss calculations as explained above, the DAS contractor needs to provide to each operator the following additional information:

- Plans of the building to be covered
- Link budget: to allow the operator to fill in its obligation in terms of health file and to verify if the installation is indeed permit-free. The link budget file has to be in a format that allows easy simulations by mobile operators (for example Excel) and has to be provided with the formulas.
- Measurement reports
- Coverage simulation (optionally - if available)
- Data sheets in case of use of non-listed components (see chapter 3.5 and annex)

f. Building and health permits

The DAS owner/contractor must ensure that the indoor installation is fully compliant with the applicable regulations concerning building permit and electromagnetic emission norms. In Belgium, regulations are different in the 3 regions.

If needed by the applicable regional regulation, a building permit is to be introduced by the building/DAS owner only if the M-O DAS RF design foresees the installation of a pick-up antenna on the roof.

Concerning health issues, the relevant norms on electromagnetic emission are the following:

- 1) The applicable norm on electromagnetic emissions
- 2) The environmental permit (EP) exemption Rule

Indoor installations are not subject to an environmental permit/notification or certification of conformity provided that the antenna power does not exceed certain thresholds defined at regional level:

Flanders

*2W ERP = 3,28W EIRP for each antenna by operator, technology, frequency band
Based on the maximum power.*

Wallonia

*4W EIRP for each antenna by operator and technology (frequency bands on the same technology are cumulated except 2G 900 and 2G 1800)
Based on the maximum power.*

Brussels

2W EIRP for each antenna all operators, technologies and frequency bands cumulated

Mobile operators will only check that all installed antennas emit below the above mentioned exemption threshold so as to know if a health permit must be introduced.

Taking into account the important administrative burden of having to prepare a health permit and the related cost that would have to be supported by the DAS owner, operators strongly recommend that the design would be done in such a way that the M-O DAS would remain below applicable health norms in all places, floors and so that there would be no need to introduce a health permit. This is also the best way to ensure that the effective indoor installation will be fully in line with applicable health norms.

If a health permit would nevertheless need to be introduced, it will be handled by each concerned operator based on information that has to be provided by the DAS owner/contractor. It is therefore very important that the DAS RF final design which is submitted for approval to each operator perfectly reflects the reality and is also updated and communicated again to the operators in case of modifications to the M-O DAS later on. The list of the documents to be communicated and their format will be provided by the operators after evaluation of the design. The cost of such permit will be supported by the DAS owner/contractor.

It is important to add that being exempted from having to introduce a health permit is a pure administrative relaxation and does not mean that the applicable norms on electromagnetic emissions do not have to be respected. The applicable levels of allowed exposure still have to be respected - even if they are below the exemption thresholds. They are still to be taken into account, particularly because people can be close to the antennas. This aspect is depending fully on how the M-O DAS will be constructed and so will remain the responsibility of the DAS owner/contractor.

Mobile operators will inform the building/DAS owner duly in time in case of a modification/strengthening of the applicable health regulation. The building/DAS

owner will then have a legally pre-defined period to modify its M-O DAS according to the new applicable norms.

In case of complaints, the competent administration may be asked to verify the exposure levels. If the activated M-O DAS would not comply with applicable health norms, the building/DAS owner will have 24 hours to modify the M-O DAS if the M-O DAS is the cause of the infringement. If this would not happen, operators will be authorized to lower the power or to de-activate their equipment.

In case of fines due to health norms infringements, operators will also be authorized to pass them on to the building/DAS owner.

3.3.2. Tasks of the mobile operators

If a health permit would need to be introduced, it will then be handled by each concerned operator. Health permits are linked to the use of mobile operators' spectrum and so will remain under the responsibility of operators.

Operators are also responsible for the validation of the final RF design. Such task must be performed by the radio engineering department of each mobile operator. Each operator will review the design on compliancy for connection to the operator infrastructure and compatibility with the operator macro network. Such a review will be provided within 20 working days, on the condition that the operator received a full and complete design file.

The validation will include the following information:

- a. Technologies that will be activated and the frequency bands that will be used
- b. The type of radio equipment that will be connected
- c. The space requirement for its equipment (typically 2 racks per operator in case of use of BTS)
- d. In case of repeaters: number of pickup antenna(s) needed and their preferred location and orientation on roof or outdoor walls
- e. The power requirements

Due to the fact that operators are constantly investing in their network and that their network are evolving over time, operators cannot guarantee that the design will still be valid for a period longer than 12 months. This means that the final installation should occur within the 12 months after the RF Detailed Design validation. If the final installation occurs only after 12 months a new validation will be needed. Operators will provide an answer within 20 working days.

At this stage, operator will have to confirm to the building owner that they will connect to the M-O DAS. This will be formalized through the signature of a contract

between each operator and the building owner. Enough time will be needed to come to a final agreement and finalize the conditions of the contract.

3.4. Opening works meeting – Step 7

Once all contractual agreements have been closed and before starting the physical rollout of the project, the building owner will organize an ‘opening works meeting’ in the concerned building with all involved operators. During this working meeting the following details will be discussed in the field:

- Verify correctness of the Detailed Design & potential changes in design during construction
- Verify location and type foreseen for the active equipment
- Verify location, type and direction of pickup antenna
- Verify power connectivity for active equipment
- Verify cabling connectivity foreseen for the operators inside the building (number of single mode fibre lines)
- Verify transmission entry point and/or transmission room
- planning of installation (active radio equipment and transmission)

After this meeting and if no remaining open questions, the operators will be able to order all the active equipment and the required transmission/connectivity equipment and will be able to start planning all works together with their own subcontractors.

3.5. Installation of the M-O DAS – Step 8

During this phase, the DAS contractor will proceed with the installation of the different passive components of the M-O DAS in accordance with the latest validated RF design.

To ensure the correct operation and compatibility of the M-O DAS with the equipment of the mobile network operators, only components which are approved by the mobile operators may be used. The list of approved components may be reviewed and updated regularly and is attached to this document. In case a DAS contractor wants to use other components not included in the pre-defined list, it has then to provide to each operator all the technical characteristics of these components. Operators may also request a sample at no expense in case they want to test the concerned component.

In case one (or more) operator has decided to work with repeaters, the DAS contractor will be responsible for the installation of the pick-up antenna on the roof and the cables between the pickup antenna(s) and the repeater(s).

The DAS contractor will make sure the requested power requirements for radio equipment and/or connectivity are made available for each operator.

If for any reason, some changes in the design are required during the construction phase, the DAS contractor will submit to the operators - for consultation and validation - a new revised design with the proposed changes. Operators will have 20 working days to respond to it.

Connectivity & transmission cabling

Each operator will provide the needed connectivity from outside the building up to the transmission room via a tube/subduct foreseen by Das contractor. The connectivity cabling will be provided and installed by operators. The DAS contractor will have to foresee a tube/subduct (HDPE 50mm) for each operator in the project, between private property (building intro) and public domain + along the route, every 50m and for every direction change, a waiting pit needs to be foreseen. As explained hereafter, all other connectivity and transmission cabling will be provided by the DAS contractor.

All passive components that allow an operator to connect its equipment to the DAS will be provided by the DAS contractor. The type of equipment will depend on the number of operators that will connect to the DAS and on the technologies (frequency bands) that will be activated by each operator.

The DAS contractor is responsible to provide enough single mode fibre lines from the transmission room to the equipment room in case these rooms are distinct. Depending on the building size and the availability of technical rooms, transmission room(s) and/or equipment room(s) may be provided in one single room or in different rooms.

A connectivity point to the M-O DAS has to be provided by the DAS contractor in the equipment rooms. This point should be located at more or less equal distance of the respective operator's DAS connection point (aiming for equal cable losses). For all the components in the antenna line we recommend the use connector type 4.3-10 or 7/16 DIN or N-connectors. If requested by an operator, optical fiber lines should be provided with connectors of the requested type and link quality.

Technical room(s) - specifications

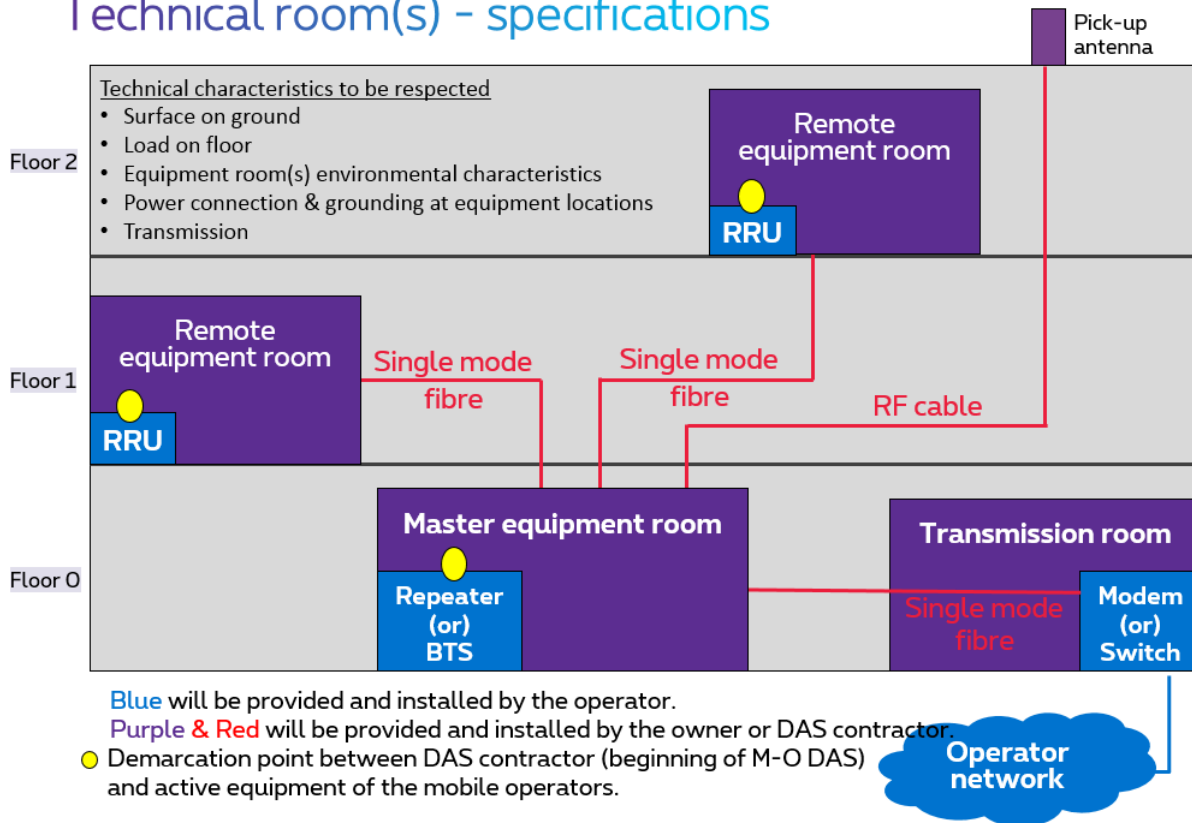


Figure 7: illustration of technical rooms

At commissioning phase the DAS contractor will provide an “as-built-document” to all operators (including operators which would have decided not to connect to the DAS as from its construction – to be documented in the notification-tool). This document will include:

- The final design and the final implementation plans
- A contact list including all points of contact relevant for the maintenance of the M-O DAS (during business hours and outside business hours)
- The access procedures the operators should respect in terms of access to their active equipment and technical rooms (in case of repeater, also access procedure to the roof where the pick-up antenna is installed)

The DAS contractor will also provide a full measurement report (see annex for more info concerning the PIM & VSWR measurements)

3.6. Acceptance site visit – Step 9

Once the DAS is completely installed by the DAS contractor and everything has been foreseen to accommodate the equipment of each operator (room, power, connectivity cabling, etc.) an acceptance site visit will be organized.

The DAS contractor needs to be present during this site visit, together with the building owner or its duly delegated representative.

Operators will mandate one of them to carry out the acceptance visit. Operators will only take one acceptance visit at their charge. During this acceptance visit, the mandated operator will perform the following tasks:

- Measurements to evaluate the M-O DAS system on design and link budget.
- A quality control with the aim to limit the risk of poor functioning of the installation and ensure a correct maintenance afterwards. This will include check of ground cables, labelling of the cables, fixation of the antennas and any point that could have an impact on the correct operation of the installation.

3.7. Activation of the M-O DAS – Step 10

In case of positive validation by the mandated operator, each operator will then proceed with the installation and effective connection of its radio equipment to the M-O DAS and the site will be put on air. It is to be noted that the radio equipment could also be installed by the operators during the installation phase and so before the acceptance visit occurs.

Each operator will then perform additional tests. If the tests show that some areas of the building do not have sufficient coverage, it will be the responsibility of the DAS contractor to adapt the installation according to operator request (for example by adding additional antennas).

In case the design has to be reviewed, an adapted new design is to be provided within 20 working days.

In case of negative validation by the mandated operator (because some aspects of the installation are not compliant with the requirements of the operators) the site will not be put on air.

In such case the operator will explain why the installation does not comply with the requirements and as a result cannot be put on air. The DAS contractor will have 20 working days to proceed with the necessary adaptations.

When all operators have activated their equipment and the site is on-air, the DAS contractor will execute a walk-test measuring the signal strengths and quality in all covered areas for all operators and all activated technologies. This coverage measurement report must confirm that the indoor installation is fully in line with all relevant building and environmental regulation and will be transferred to the

building owner and to the operators by adding the report to the project-folder in the notification-tool.

4. CHANGE REQUESTS IMPACTING AN EXISTING M-O DAS

4.1. Additional operator on an existing M-O DAS

If an extra operator is to join an existing M-O DAS (owned by the building owner), a very similar process is to be respected:

- New operator has to introduce a request to join (Step 4)
- The building owner informs the existing operators of an extra operator using the notification process
- The building owner/DAS contractor verifies the potential impact on the existing Detailed Design and decides whether an extra Site measurement would be required (Step 5)
- The building owner/DAS contractor submits the modified Detailed Design to the other operators for approval (Step 6)
- If no modifications on DAS are required:
 - Building owner/DAS contractor & new operator plan 'Opening Works Meeting' (Step 7)
 - Building owner/DAS contractor & new operator plan installation of active equipment and connectivity (Step 8)
 - If no new combiner needed:
 - New operator activates connectivity and active equipment (Step 10)
 - If new combiner needed:
 - Building owner/DAS contractor plans new combiner installation and aligns with existing operators on intervention window
 - New operator activates connectivity and active equipment (Step 10)
- If modifications on DAS are required:
 - Building owner/DAS contractor & new operator plan 'Opening Works Meeting' (Step 7)
 - Building owner/DAS contractor & new operator plan installation of active equipment and connectivity (Step 8)
 - Building owner/DAS contractor & new operator do DAS acceptance (Step 9)
 - Building owner/DAS contractor aligns with existing operators on intervention window of activation DAS modifications + new operator activates connectivity and active equipment (Step 10)

NOTE:

- If a combiner is already present and has a spare connection, no downtime is to be foreseen.
- If no combiner is present or no free connection on the existing combiner, a new combiner will be installed. In mutual agreement with the building owner, this intervention can be planned during non-office hours to keep the impact towards the client limited to a maximum downtime of 2h.
- In case of Detailed Design changes of the existing DAS would be required outage time can be longer.

4.2. An operator decides to quit the M-O DAS

The operator will dismantle the active equipment in the contractually agreed timeframe. The remaining operational operators will be informed by the building owner but there will be no impact on them or on the M-O DAS installation.

4.3. M-O DAS modification

By modification we understand for example, the introduction of a new technology (e.g. 5G) or an extension/reduction of the indoor coverage (e.g. a new area to be covered) or capacity (e.g. switch from repeaters to base station solution). A modification of the M-O DAS could also occur following a modification of the relevant electromagnetic emission regulation.

In this later case, mobile operators will inform the building/DAS owner duly in time of such modification/strengthening of the applicable health regulation. The building/DAS owner will then have a legally pre-defined period to modify its M-O DAS according to the new applicable norms.

Any request of extension/reduction of an existing M-O DAS will in most cases initiate the launch of a new Execution Phase process (Step 5 to Step 10).

If an extension/reduction of an M-O DAS would lead to an impact on operator active equipment or connectivity, this change will also require a review of the commercial agreement between the impacted operators and the building owner.

4.4. Full dismantling of an existing M-O DAS

Each concerned operator will be informed in the contractually agreed pre-notice timeframe (period depending on the commercial agreement between each individual

operator and the building owner) to allow the dismantling of the active equipment and the transmission.

The coordination is to be organized by the building owner/DAS contractor.

Abbreviations

BTS:	Base Transmission Station
RF:	Radio frequency
M-O DAS:	Multi-Operator Distributed Antenna system
MH:	Mexican Hat
MNO:	Mobile Network Operator
EP:	Environmental Permit
VSWR:	Voltage Standing Wave Ratio
EIRP:	Equivalent Isotropically Radiated Power
PIM:	Passive Intermodulation Measurement
RRU:	Radio Remote Unit
BTS:	Base Transceiver Station

Portfolio
DAS RF Equipment
Q1 2018

**Passive DAS interoperator
workgroup**

Status : Final
Revision : 1.0
Datum : 11 March 2019
Author : Eric Noordanus

Purpose

This document lists the portfolio of DAS RF Equipment products which are allowed to be used or have been used in the indoor DAS coverage networks of Mobile Network Operators (further referred as MNO). This document is therefore a reference to know which materials to use for a new indoor DAS coverage network design or to know when a such a network needs to be adapted or in case of need of repairs. For that purpose the status of use of these DAS RF equipment products (ie. NEW, LTB, PHASE OUT) are provided in here.

This document doesn't provide the full requirements of usage or installation of this equipment. For that the applicable vendor documentation, legal requirements (AREI, BIPT) and indoor DAS design guidelines are referred to. Specific vendor documents and legal requirements are not named in this document. The user of this document is expected to have, know and apply these.

Scope

DAS RF equipment products that are part of the RF signal path from antenna to the connection point where MNO connects their active equipment to (the infrastructure connection point). So coax cables, connectors, tappers, splitters, antennas etc. are listed. Other materials like cable ducts, cable clamps, power cables, labels etc. are not part of the signal path and are therefore not listed in here. Requirements concerning these are indicated in the indoor DAS design guideline or indicated during the DAS design validation by MNO (i.e. DAS RF equipment power connections).

How to use this document

All DAS RF Equipment products used for the network of the MNO, should be of the types and as listed in this document until a new version of this document is released. Updates are published depending on need, taking into account latest information on DAS equipment development.

It is the responsibility of the user of this document to verify he or she is using the latest version available.

For every RF equipment a column is added in which the equipment status is indicated (i.e. NEW, LTB)

Definitions

DAS (Distributed antenna system): Signal distribution system installed to provide coverage in a specific building to enable users to use their mobile/smartphone in agreed communication bands and services (i.e. 2G, 3G, 4G, 1800, 2100,...), also called RF signals and services.

RF equipment products: All RF equipment used on a base station/site, excluding the equipment responsible for transmission services, like modems, mini-links and AC power cabinets.

DAS RF equipment products, further referred as DAS equipment: all RF equipment to distribute RF signals and services.

Mobile network operators (MNO): In the context of this document these are the companies Orange Belgium, Proximus, Telenet.

Status definitions:

New: DAS equipment that can be used for installation in the indicated regions

Repair only: DAS equipment not to be used for new design or implementation as more future proof or better product is available for, but vendor not declared LTB yet and can be replaced with same type in case of failure. DAS equipment is still available at supplier in case of repairs.

Last Time Buy: Also indicated as LTB. DAS equipment for which the vendor has stopped producing. In case of stock available from other sources, repair using same type is still allowed.

Phase out: DAS equipment for which a significantly more future proof or better product is available for.

For all not having the status new, the successor or alternative solution is indicated.

Table of contents

		Page
1	ANTENNAS.....	4
1.1	MICRO CELL, INDOOR & TUNNEL ANTENNAS.....	4
1.2	ANTENNA INSTALLATION CLAMPS AND BRACKETS.....	4
2	FEEDERS.....	5
2.1	FEEDER GROUNDING KITS	5
3	JUMPERS	6
4	INDOOR DAS FEEDER SYSTEM MATERIALS.....	7
4.1	DUAL- AND TRIPLE BAND COMBINERS (DIPLEX FILTERS)	7
4.2	DC-STOP FILTERS.....	7
4.3	COUPLERS, COMBINERS, SPLITTERS, TAPPERS.....	7
4.4	LOADS AND ATTENUATORS	8
5	ALTERNATIVE VENDORS	9
5.1	REQUIREMENTS TO THE ALTERNATIVE SUPPLIER.....	9
5.1.1	<i>Minimum company size</i>	9
5.1.2	<i>Financial stability</i>	9
5.2	MEETING THE SPECIFICATIONS	9
5.2.1	<i>Equipment durability</i>	9
5.2.2	<i>Quality guarantee process</i>	9
5.3	PRODUCT REQUIREMENTS.....	10
5.3.1	<i>Jumper requirements</i>	10

List of tables

		Page
	TABLE 1: MICRO CELL AND TUNNEL ANTENNA PORTFOLIO.....	4
	TABLE 2: INDOOR ANTENNA PORTFOLIO.....	4
	TABLE 3: PICKUP ANTENNA FOR REPEATERS.....	4
	TABLE 4: STANDARD JUMPER TYPES 7/16"-7/16".....	6
	TABLE 5: STANDARD JUMPER TYPES 7/16 TO N OR 4.3-10.....	6
	TABLE 6: DUAL & TRIPLE BAND COMBINERS (DIPLEX FILTERS)	7
	TABLE 7: DC-STOP FILTER.....	7
	TABLE 8: COUPLERS, COMBINERS, SPLITTERS, TAPPERS	8
	TABLE 9: LOAD AND ATTENUATORS	8
	TABLE 10: RF EQUIPMENT AND THEIR PREFERRED SUPPLIER.	9
	TABLE 11: JUMPER INSERTION LOSS REQUIREMENTS	10
	TABLE 12: JUMPER VSWR/RETURN LOSS REQUIREMENTS	10
	TABLE 13: JUMPER INTERMODULATION REQUIREMENTS	10
	TABLE 14: JUMPER BEND RADIUS REQUIREMENTS.....	10
	TABLE 15: JUMPER ALLOWED TIGHTENING TORQUE REQUIREMENTS	10
	TABLE 16: OTHER JUMPER REQUIREMENTS	11

1 Antennas

This section lists all antennas allowed for usage or ever used for indoor, DAS and tunnel networks.

Micro cell, indoor & tunnel antennas

Antenna type	Vendor	Band	type	Design Status	Remark/successor
738 447	Kathrein	8/9/18/21/26	Shark fin	LTB	7/16" female
738 448	Kathrein	8/9/18/21/26	Shark fin	LTB	N female
800 20448	Kathrein	8/9/18/21/26	Shark fin	NEW	4.3-10 female
800 10753	Kathrein	8/9/18/21/26	67° -55°	NEW	7/16" female
7825 100	Amphenol	9/18/21/26	Omni	Phase Out	N female->800 10847
800 10847	Kathrein	8/9/18/21/26	Omni	NEW	N female
7478 200	Amphenol	9/18/21	Log-Per	New	7/16" female
742 290	Kathrein	9/18/21	90° -82°	Phase Out	7/16" female
5029 000	Amphenol	9/18/21	115°	Phase Out	N female
5029 000 DIN	Amphenol	8/9/18/21/26	115°	New	7/16" female
HADA-0790/ 1827-N-5/8/6-0	Huawei	8/9/18/21/26	90°	NEW	N female

Table 1: Micro cell and tunnel antenna portfolio

Antenna type	Vendor	Band	type	Design Status	Remark/successor
800 10465	Kathrein	8/9/18/21/26	90°	New	N female
800 10748	Kathrein	9/18/21/26	Mexican hat	Phase Out	N female
800 20249	Kathrein	8/9/18/21/26	Mexican hat	NEW	4.3-10 female;

Table 2: Indoor antenna portfolio

The indoor antennas are not to be used in outdoor environment applications. Outdoor environment applications include tunnels or semi-indoor environments where equipment is exposed to risks comparable to outdoor environments, like dirt or water (i.e. high water pressure cleaning). Tunnel and micro cell antennas can be used in indoor environments when the area that needs to be covered can be solved by an antenna of this kind.

Pickup antenna

Antenna type	Vendor	Band	type	Remark/successor
7366179	Amphenol	18	Yagi	N female
JB7175890	Amphenol	8/9	Yagi	N female
JB7132900	Amphenol	9	Yagi	N female
JB7360008	Jaybeam	21	Yagi	N female
K800 10 368	Kathrein	18/21	panel	7-16 DIN female

Table 3: Pickup antenna for repeaters

For repeaters we will need an antenna we can add outdoor on the roof or wall mounted to capture the outdoor signal that will be used by the repeater.

Antenna installation clamps and brackets

Only standard antenna installation materials (i.e. clamps and brackets) provided by the antennas supplier are approved for use.

2 Feeders

Eupen and RFS are approved for new installations as suppliers for feeders with the types mentioned below. Default feeder colour is black, grey colour is allowed if this is required from an acquisition point of view. Cables should be halogen free, flame retardant and low smoke density. For re-use of feeders of other types (or vendors) already present on site, the MNO should be contacted for approval. We advice to use the low loss feeders. We add fire proof cabling for new installations to be in line with new standard EN 50575:2014/A1:2016 and effective as from 01/07/2017. This CPR 50575 (Construction Products Regulation) concerns the Reaction to Fire for Power, Control and Communications Cables intended to be used in permanent installation for general applications in construction works.

Low loss type Cable Size	EUPEN REF BLACK	RFS Cable	Connectors
1/2"		LCF 12-50J	
7/8"	EC 5-50 A FR*	LCF 78-50JA-A8	43FV78N1
1.1/4"	EC 6-50 A FR*	LCFS 114-50JA-A8	
1.5/8"	EC 7-50 A FR	LCF 158-50JA-A8	
Altern. type Cable Size	EUPEN REF GREY		
1/2"	EC4-50-G or EC4-50-HF-G		716F-LCF-12-B32
7/8"	EC5-50A-G or EC5-50-HF-G		716F-LCF-78-B32
1.1/4"	EC6-50A-G or EC6-50-HF-G*		716F-LCF-114-B32
1.5/8"	EC7-50A-G		716F-LCF-158-B32
High Flex type Cable Size	EUPEN REF BLACK		
1/2"	EC 4-50 HF FR		
7/8"	EC 5-50 HF FR		
1.1/4"	EC 6-50 HF FR		
1.5/8"			
FRC-Cable Size	EUPEN REF BLACK		
1/2"	EC4-50-FRC or		
1/2"	EC4-50-HF-FRC		
7/8"	EC5-50A-FRC		
1.1/4"	EC6-50A-FRC		
1.5/8"	EC7-50A-FRC		

* MOQ=10km

Table 4: Approved feeder types

Feeder grounding kits

Approved are Eupen GCS with either parallel or angular outlets. Parallel outlet is to be used when the grounding bar is installed lower from the grounding kit position, angular outlet is to be used when the grounding kit is installed next to the outlet. Grounding bars are NEVER installed on a position higher than the grounding kit on a feeder.

A grounding kit should always be of the same dimension of the feeder on which it needs to be applied. Grounding kits are not needed indoor, but should be installed whenever a cable enters a building from outside to inside (i.e. from a repeater antenna).

Author: Eric Noordanus	Approved by: Passive DAS interoperator workgroup
Document Number: Portfolio DAS RF equipment 2017 Q4	Revision: 1.0
Document status: Final	Copyright © 2017 Interoperator Workgroup

3 Jumpers

Pre-fabricated jumpers are preferred to be used. Hand-made jumpers need to be measured to have their quality confirmed. This is not needed for newly installed pre-fabricated jumpers when handled within installation specifications (bending radius, installation torque, pulling strength etc.).

Telegaertner, RFS and Eupen are approved as suppliers for these jumpers with the types mentioned below. Jumpers from these vendors can be mixed in use on a site.

Length (m)	Cable Type	straight male 7/16 DIN Câblerie d'Eupen	Straight Code	N to 7/16 Code	Straight RFS/ Spinner	Angled Quadrant	Angled RFS/Spinner
0.5	High-flex	EC4-HF-S-050-DMDM					
1	High-flex	EC4-HF-S-100-DMDM	JMPS/1000K	JMPS/1004K	7M7MS12-0100FFP	JMPS/1002	7M7MRS12-0100FFP
1,5	High-flex	EC4-HF-S-150-DMDM	JMPS/1500K	JMPS/1504K	7M7MS12-0150FFP	JMPS/1502	7M7MRS12-0150FFP
2	High-flex	EC4-HF-S-200-DMDM					
2,5	High-flex	EC4-HF-S-250-DMDM					
3	High-flex	EC4-HF-S-300-DMDM					
4	High-flex	EC4-HF-S-400-DMDM					
5	High-flex	EC4-HF-S-500-DMDM					
1	Low-loss	EC4-S-100-DMDM					
1.5	Low-loss	EC4-S-150-DMDM					
2	Low-loss	EC4-S-200-DMDM	JMPS/2000D	JMPS/2004D	7M7ML12-0200FFP	JMPS/2002	7M7MRS12-0200FFP
2,5	Low-loss	EC4-S-250-DMDM	JMPS/2500D	JMPS/2504D	7M7ML12-0250FFP	JMPS/2502	7M7MRS12-0250FFP
3	Low-loss	EC4-S-300-DMDM	JMPS/3000D	JMPS/3004D	7M7ML12-0300FFP	JMPS/3002	7M7MRS12-0300FFP
4	Low-loss	EC4-S-400-DMDM	JMPS/4000D	JMPS/4004D	7M7ML12-0400FFP	JMPS/4002	7M7MRS12-0400FFP
5	Low-loss	EC4-S-500-DMDM	JMPS/5000D	JMPS/5004D	7M7ML12-0500FFP	JMPS/5002	7M7MRS12-0500FFP
6	Low-loss		JMPS/6000D		7M7ML12-6000FFP		
7	Low-loss		JMPS/7000D		7M7ML12-7000FFP		
8	Low-loss		JMPS/8000D		7M7ML12-8000FFP		
9	Low-loss		JMPS/9000D		7M7ML12-9000FFP		
10	Low-loss		JMPS/10000D		7M7ML12-10000FFP		

Table 4: Standard jumper types 7/16"-7/16"

Length (m)	Cable Type	Straight male 4.3-10 to 7/16 Câblerie d'Eupen	Straight male 4.3-10 Câblerie d'Eupen	N-7/16 Telegaertner	4.3-10 to 7/16 Telegaertner	4.3-10 to 7/16 RFS
1	High-flex	EC4-HF-S-100-DM43M	EC4-HF-S-100-43M43M	JMPS/1004K	JMPS/1007K	7M43MS12-0100FFP
1	Low-loss	EC4-S-100-DM43M	EC4-S-100-43M43M			
1,5	High-flex	EC4-HF-S-150-DM43M	EC4-HF-S-150-43M43M	JMPS/1504K	JMPS/1507K	7M43MS12-0150FFP
1,5	Low-loss	EC4-S-150-DM43M	EC4-S-150-43M43M			
2	High-flex	EC4-HF-S-200-DM43M	EC4-HF-S-200-43M43M			
2	Low-loss	EC4-S-200-DM43M	EC4-S-200-43M43M	JMPS/2004D	JMPS/2007D	7M43ML12-0200FFP
2,5	Low-loss			JMPS/2504D	JMPS/2507D	7M43ML12-0250FFP
3	High-flex	EC4-HF-S-300-DM43M	EC4-HF-S-300-43M43M			
3	Low-loss	EC4-S-300-DM43M	EC4-S-300-43M43M	JMPS/3004D	JMPS/3007D	7M43ML12-0300FFP
4	High-flex	EC4-HF-S-400-DM43M	EC4-HF-S-400-43M43M			
4	Low-loss	EC4-S-400-DM43M	EC4-S-400-43M43M	JMPS/4004D	JMPS/4007D	7M43ML12-0400FFP
5	High-flex	EC4-HF-S-500-DM43M	EC4-HF-S-500-43M43M			
5	Low-loss	EC4-S-500-DM43M	EC4-S-500-43M43M	JMPS/5004D	JMPS/5007D	7M43ML12-0500FFP
6	High-flex	EC4-HF-S-600-DM43M	EC4-HF-S-600-43M43M			
6	Low-loss			JMPS/6004D	JMPS/6007D	7M43ML12-0600FFP
7	Low-loss			JMPS/7004D	JMPS/7007D	7M43ML12-0700FFP
8	Low-loss			JMPS/8004D	JMPS/8007D	7M43ML12-0800FFP
9	Low-loss			JMPS/9004D	JMPS/9007D	7M43ML12-0900FFP
10	Low-loss			JMPS/10004D	JMPS/10007D	7M43ML12-1000FFP

Table 5: Standard jumper types 7/16 to N or 4.3-10

The minimum length allowed for any jumper (angled or straight) is 1m.

Author: Eric Noordanus	Approved by: Passive DAS interoperator workgroup
Document Number: Portfolio DAS RF equipment 2017 Q4	Revision: 1.0
Document status: Final	Copyright © 2017 Interoperator Workgroup

4 Indoor DAS feeder system materials

Dual- and Triple band combiners (diplex filters)

Dual/triple band combiners, also called diplex or triplex filters combine signals from different frequency bands. They are available as single units or double, equal units for ease of installation in case of dual feeder systems. Most units are available with or without internal DC stops. For DAS networks these can be considered equal and are mentioned in the table as alternatives.

combiner	Band capability of port						unit	alternative	Vendor	Status	
	Tetra	700	800	900	1800	2100					2600
782 10278			1	1	1	2		Single		Kathrein	NEW
782 10620					1	2		Single	783 10622	Kathrein	NEW
783 10621					1	2		Double	783 10623	Kathrein	NEW
782 10669		1	1	1	2	2	2	Double		Kathrein	NEW
782 10630	1	1	1	1	2	3		Single	782 10632	Kathrein	NEW
782 10631	1	1	1	1	2	3		Double	782 10633	Kathrein	NEW
782 11190			1	2	3	3	3	Single	782 11192	Kathrein	NEW
782 11191			1	2	3	3	3	Double	782 11193	Kathrein	NEW
782 11400					1	2	3	Single	782 11402	Kathrein	NEW
782 11401					1	2	3	Double	782 11403	Kathrein	NEW

Table 6: Dual & Triple band combiners (diplex filters)

The number in the table in the section 'band' shows the frequency band compatibility of the port with related number.

For Kathrein odd type numbers are double combiner units (two units stacked), even type numbers indicate single combiner units (one unit only). Unused ports should be decoupled by using a 50Ω (dummy) load of applicable power capability.

DC-stop filters

DC-stop filter	Vendor	Status	Remark/Successor
782 10850V01	Kathrein	NEW	

Table 7: DC-stop filter

Couplers, combiners, splitters, tappers

Type	Supplier	Status	Remark/Successor	Description
782 10524	Kathrein	NEW	7/16, 698-2690M, 150W/port	2:2 Hybrid combiner 7/16"
782 10534	Kathrein	NEW	7/16, 698-2690M, 150W/port	4:4 Hybrid combiner 7/16"
860 10101	Kathrein	NEW	7/16, 694-3800M, 700W/port	2 way splitter 7/16"
860 10103	Kathrein	NEW	7/16, 694-3800M, 700W/port	3 way splitter 7/16"
860 10105	Kathrein	NEW	7/16, 694-3800M, 700W/port	4 way splitter 7/16"
860 10150	Kathrein	NEW	7/16, 694-2700M, 500W/port	2 way tapper 1dB/7dB 7/16"
860 10151	Kathrein	NEW	7/16, 694-2700M, 500W/port	2 way tapper 0,4dB/10,4dB 7/16"
860 10152	Kathrein	NEW	7/16, 694-2700M, 500W/port	2 way tapper 0,1dB/15,1dB 7/16"
CA84D	Micro-Lab	NEW	7/16, 694-2700M, 80W/port	3dB-Coupler
CM-A76	Micro-Lab	NEW	7/16, 694-2700M, 150W/port	3x3 hybrid coupler
CM88D	Micro-Lab	NEW	7/16, 694-2700M, 150W/port	4x4 hybrid coupler
DN-34FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -1.8/-4.8
DN-44FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -1.3/-6.1
DN-54FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -1.0/-7.0
DN-64FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -0.7/-8.6
DN-74FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -0.4/-10.4
DN-84FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -0.2/-13.2
DN-94FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -0.1/-15.1
DN-04FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper -0.1/-20.1
DN-14FD	Micro-Lab	NEW	7/16, 350-5850M, 500W/port	7/16 Tapper-0.1/-30.1
D2-88FD	Micro-Lab	NEW	7/16, 380-2700M, 500W/port	7/16 Splitter 2 way (3dB)
D3-88FD	Micro-Lab	NEW	7/16, 380-2700M, 500W/port	7/16 Splitter 3 way (4,8dB)
D4-88FD	Micro-Lab	NEW	7/16, 380-2700M, 500W/port	7/16 Splitter 4 way (6dB)

Author: Eric Noordanus	Approved by: Passive DAS interoperator workgroup
Document Number: Portfolio DAS RF equipment 2017 Q4	Revision: 1.0
Document status: Final	Copyright © 2017 Interoperator Workgroup

Table 8: Couplers, combiners, splitters, tappers

Loads and attenuators

Type	Supplier	Status	LTB/Start	Remark	Description
791 918	Kathrein			0-4G	Attenuator 3dB N 15W
791 919	Kathrein			0-4G	Attenuator 6dB N 12W
791 920	Kathrein			0-4G	Attenuator 10dB N 10W
791 921	Kathrein			0-4G	Attenuator 20dB N 10W
K62 26 111	Kathrein		LTB	0-2.7G	50Ω load- N connector
782 10475	Kathrein			698-2.7G	50Ω 150W load- 7/16" F connector
784 10367	Kathrein			0-4G	50Ω 1.5W load- 7/16" M connector
784 10484	Kathrein			0-7.5G	50Ω 2W load- 4.3-10 M connector
TB-70MD	Microlab			0-4G	50Ω 50W load- 7/16" M connector
AQ-03N	Microlab			0-3G	N-Attenuator 25W 3dB
AQ-06N	Microlab			0-3G	N-Attenuator 25W 6dB
AQ-10N	Microlab			0-3G	N-Attenuator 25W 10dB
AQ-20N	Microlab			0-3G	N-Attenuator 25W 20dB
AQ-30N	Microlab			0-3G	N-Attenuator 25W 30dB
JOL1124A0001	Telegaertner			NOT FOUND	50Ω load- 2W 7/16" M connector

Table 9: Load and attenuators

Author: Eric Noordanus	Approved by: Passive DAS interoperator workgroup
Document Number: Portfolio DAS RF equipment 2017 Q4	Revision: 1.0
Document status: Final	Copyright © 2017 Interoperator Workgroup

5 Alternative Vendors

For some equipment the Installation partner is allowed to select an alternative supplier. The supplier and its equipment have to fulfil certain requirements in order to be allowed for usage in the mobile network. These can be split into two parts: the specifications of the equipment and the financial stability/reliability of the alternative supplier. These must be fulfilled and proven to MNO before any equipment of any alternative supplier is allowed to be used in the DAS network.

New proof of meeting these requirements must be provided in case of change of the specifications of the equipment

If this requirement is not met related equipment must be replaced by an approved type (indicated by MNO) on cost of the DAS contractor. The DAS contractor is accountable for any cost related. This applies in any stage in the site life-time.

RF equipment for which alternative suppliers to the preferred ones are possible are:

RF equipment	Preferred Vendor
Feeder	Eupen/RFS
Feeder connector	Eupen/RFS
Jumpers	Eupen/Telegaertner/RFS
RSB clip	RFS
Grounding kits	Eupen/RFS

Table 10: RF Equipment and their preferred supplier.

Requirements to the alternative supplier

5.1.1 Minimum company size

The value of the yearly consumption in DAS networks realized in Belgium should not be more than 20% of the company production.

5.1.2 Financial stability

Financial information of company should indicate a credit rating of B or better.

Meeting the specifications

Typical value information of from a specification sheet of equipment provides only an indication and is no proof of meeting the requirements mentioned below. A value range is much better, but in general specifications need to be proven by measuring at least 3 blind-picked samples, preferably from 3 different production series. Maximum values are the allowed peak values for any sample of the equipment. Minimum values are the lowest values that can occur for any sample of the equipment. The spread is the specification bandwidth which the equipment is allowed to have.

All measurements need to be done with calibrated equipment with a valid certificate of this.

5.1.3 Equipment durability

Specifications shall not deteriorate under the conditions in this document mentioned for the product for a period of at least 10 years.

5.1.4 Quality guarantee process

Each alternative supplier or the installation partner must have a quality guarantee process to ensure the quality of the used non-preferred RF equipment keeps meeting the promised specifications.

The sample method differs per equipment type.

Product requirements

5.1.5 Jumper requirements

The requirements insertion loss, VSWR return loss and intermodulation have to be proven by lab test. For the other requirements a conformation of compliance by the supplier is sufficient.

5.1.5.1 Insertion loss

Cable sample	800-1000 MHz	1700-1900 MHz	1900-2200 MHz
1m Max. :	0,2	0,3	0,35
2m Max :	0,3	0,4	0,45
Loss spread :	0,05	0,1	0,1

Table 11: Jumper insertion loss requirements

5.1.5.2 VSWR/return loss

Cable sample	Connector	VSWR		Return loss [dB]	
		900MHz	1800MHz	900MHz	1800MHz
Max. :	male / female	1,1	1,1	-26	-26

Table 12: Jumper VSWR/Return loss requirements

5.1.5.3 Intermodulation

Cable sample	Connector	900/1800 [dBm] 2x 43 dBm- IM3
Min. :	male / female	-107

Table 13: Jumper Intermodulation requirements

The 2x 40dBm must be provided with 600 KHz spacing.

5.1.5.4 Bend radius

Cable sample	Allowed single Bending radius	Allowed repeated Bending radius
Max (low-loss) :	<=70	<=125mm
Max :		<=40mm

Table 14: Jumper bend radius requirements

The minimum repeated bend (>10x) radius shouldn't cause change on any specification of the jumper. This repeated bend is applied with a bending moment of at least 5Nm.

5.1.5.5 Allowed tightening torque

Cable sample	Allowed repeated Tightening torque	Allowed Single Tightening torque
Min :	15Nm	25Nm

Table 15: Jumper allowed tightening torque requirements

The minimum repeated tightening torque (>10x) shouldn't change any specification of the jumper.

5.1.5.6 Water tightness

The jumpers need to meet the IP X8 and IP 68water tightness requirement. This can be tested this way: The seals in the coaxial cable connectors must be able to withstand water pressure of 2.6 ±0,1bar (equivalent to a 25m head) at a temperature of 20 ±5°C for a period of 7 days. Testing method is performed by putting the open jumper connector under these conditions and sub sequentially measured if specifications are changed between before and after applying the water pressure (this way water leakage is tested).

5.1.5.7 Connector stress and vibration test

To be described later.

5.1.5.8 Other requirements

Cable sample	800-2200 MHz	Reason
Power handling	: $\geq 500W$	12 TRU at 43dBm+3dB margin.
Impedance	: 50 Ohm ($\pm 1\text{Ohm}$)	
Capacitance	: 75 pF/m	
Inductance	: 0,190 $\mu\text{H/m}$	
Insulating resistance	: $>1G$ Ohm	Between inner and outer conductor
RF Voltage Rating (peak)	: >1 KV	Withstand remaining lightning field
Velocity propagation (low-loss)	: 88% ($\pm 1\%$)	
Velocity propagation (High-flex)	: 82% ($\pm 1\%$)	
Temperature range (installation)	: -40-+60°C	
Temperature range (Operating)	: -45-+85°C	
Maximum clamp spacing	: $\geq 1\text{m}$	Jumper rigidity
Weight	: $<1,2\text{kg}$	Load on active equipment
Tensile strength	: $>1\text{KN}$	Pulling weights $>100\text{kg}$
Flat plate crush strength	: >20 N/mm	

Table 16: Other jumper requirements

The tensile strength minimum is required so the jumper is able to withstand a pulling weight of 100kg.

The jumpers need to be corrosion and UV resistant for at least 10 years (Salt spray conditions norm ASTM B117 or IEC 60512-6 test 11f).

5.1.5.9 Quality check requirements

To ensure specifications are maintained during delivery the following sample check plan should be used. The sampling plan is derived from BS 6001: Part 1: ISO 2859-1, General Inspection Level II, with an Acceptable quality level of 1%-Normal inspection.

Lot or Batch size	Sample size	Accepted	Rejected
<14	100%	-	-
14-150	13	0	1
151-500	50	1	2
501-1200	80	2	3
1201-3200	125	3	4
3201-10000	200	5	6
10001-35000	315	7	8

For a batch of 1500 if 3 or less faulty jumpers are found it is sufficient if these are replaced with correct ones, if 4 or more are found in the sample size the entire batch is to be rejected

**Annex 3
Mobile Indoor PIM and VSWR
test procedures
Q4 2017**

**Passive DAS interoperator
workgroup**



1 Abbreviations

- PIM – Passive intermodulation
- DL – Downlink
- UL – Uplink
- BW – bandwidth
- SSV – site survey
- VSWR – Voltage to Standing Wave Ratio

2 Objectives

The main objectives of this document is to describe the method on how to measure the inter-modulation (PIM) and the mismatch between the feeder system and its connected loads (VSWR) on a Multi Operator passive Distributed Antenna System (M-O DAS) in order to achieve a well behaving system for Mobile services.

The PIM and VSWR measurements will be performed on the DAS system which may cover multi-operator scenario. Those measurements are very important and will be crucial for project validation.

Passive intermodulation (PIM) is a form of intermodulation distortion that occurs in passive components such as antennas, cables, connectors, or duplexers with two or more high-power input signals. PIM in the transmission path degrades quality of the wireless communication system.

Voltage to standing wave ratio (VSWR) indicates the ratio between the power that was connected to the system and what is actually transmitted or absorbed by the combination of antennas and loads connected to the DAS system.

Table of contents

Page

1	ABBREVIATIONS	2
2	OBJECTIVES	2
4	PIM AND VSWR SOURCES	4
5	TECHNOLOGY AND FREQUENCIES	4
5.1	GSM 900	4
5.2	UMTS900	4
5.3	UMTS 2100	4
5.4	LTE 800	5
5.5	LTE 1800	5
5.6	LTE 2600	6
6	MEASUREMENTS METHODOLOGY	7
6.1	PIM	7
6.1.1	<i>PIM Measurement Power</i>	7
6.2	PIM MEASUREMENT FREQUENCY	7
6.3	PIM TEST THRESHOLD	7
6.4	DYNAMIC AND STATIC PIM TESTING.....	7
6.5	VSWR.....	8
6.5.1	<i>VSWR measurement frequency</i>	8
6.6	VSWR THRESHOLD.....	8
6.6.1	<i>Report template</i>	9
7	DAS COMPONENTS	9

4 PIM and VSWR Sources

The primary sources of PIM sources at a cell site are inconsistent metal to metal contacts in high current density regions such as inside transmission lines, inside RF components or outside the system but in the main beam of the antenna. Clean metal surfaces with high contact pressure generally behave in a linear manner and do not generate PIM. Where there is loose contact between metal surfaces, a non-linear relationship develops between the applied voltage and the resulting current flow across the joint causing PIM to be generated.

In the field, PIM sources can be caused by:

- I. Contaminated surfaces or contacts due to dirt, dust, moisture or oxidation;
- II. Loose mechanical junctions due to inadequate torque, poor alignment or poorly prepared contact surfaces;
- III. Loose mechanical junctions caused by transportation shock or vibration;
- IV. Metal flakes or shavings inside RF connections;
- V. Poorly prepared RF connections:
 - a. Trapped dielectric materials (adhesives, foam, etc.);
 - b. Cracks or distortions at the end of the outer conductor of coaxial cables caused by over tightening the back nut during installation.
 - c. Solid inner conductors distorted in the preparation process causing these to be out of round or tapered over the mating length;
 - d. Hollow inner conductors excessively enlarged or made oval during the preparation process;
 - e. Nearby metallic objects in the main beam and side lobes of the transmit antenna including roof flashing, vent pipes, guy wires, etc.

Though not influenced in the same way as PIM, sources of decrease of VSWR and PIM are the same as for example, metal surfaces can reflect signal back into the antenna, or poorly prepared RF connections cause signal to reflect back to the radio transmission unit.

5 Technology and Frequencies

5.1 GSM 900

For GSM PIM tests it will be considered Proximus GSM900-frequencies with channel bandwidth (BW) of 200 kHz.

DL Channel	DL Freq. (MHz)	UL Channel	UL Freq. (MHz)
2-4	935.4-935.8	2-4	890.4-890.8
28-93	940.6-953.6	28-93	895.6-908.6

Telenet is using the E-GSM band for GSM 900 and UMTS 900

DL Channel	DL Freq. (MHz)	UL Channel	UL Freq. (MHz)
975-1024	925.0-935.0	975-1024	880.0-890.0

Orange is using the GSM 900 band for GSM 900 and UMTS 900

DL Channel	DL Freq. (MHz)	UL Channel	UL Freq. (MHz)
32-59	941.4-947	32-59	896.4-902
95-124	954-960	95-124	909-915

5.2 UMTS900

This frequency band will most likely not being used for indoor solution, but it may be considered in the specific scenario as well in case of close by macro site located.

5.3 UMTS 2100

Proximus is using three carriers on the U21 band (listed below in the table) with channel BW of 5MHz.

UMTS Band	Uarfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
1	10564	2112.8	9614	1922.8	U
1	10589	2117.8	9639	1927.8	V
1	10614	2122.8	9664	1932.8	W

Telenet is using three carriers on the U21 band (listed below in the table) with channel BW of 5MHz.

UMTS Band	Uarfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
1	10639	2127.8	9689	1937.8	
1	10664	2132.8	9714	1942.8	
1	10689	2137.8	9739	1947.8	

Orange is using three carriers on the U21 band (listed below in the table) with channel BW of 5MHz.

UMTS Band	Uarfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
1	10787	2157.4	9837	1967.4	
1	10811	2162.2	9861	1972.2	
1	10836	2167.2	9886	1977.2	

5.4 LTE 800

Proximus is using one carrier on LTE band 20 with channel BW of 10MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
20	6300	806.0	24300	847.0	J

Telenet is using one carrier on LTE band 20 with channel BW of 10MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
20	6200	796.0	24200	837.0	

Orange is using one carrier on LTE band 20 with channel BW of 10MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
20	6400	816.0	24400	857.0	

5.5 LTE 1800

Proximus is using one carrier on LTE band 3 with channel BW of 20MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
3	1303	1815.3	19303	1720.3	K

Telenet is using LTE band 3 with channel BW depending on the area. BW is shared with DCS-1800.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
3		1855.0-1880.0		1760.0-1785.0	

Orange is using one carrier on LTE band 3 with channel BW of 20MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
3	1599	1844.9	19599	1749.9	

5.6 LTE 2600

Proximus will use one carrier on LTE band 7 with channel BW of 20MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
7	2850	2630.0	20850	2510.0	L

Telenet will use one carrier on LTE band 7 with channel BW of 15MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
7	3175	2655.0-2670.0	21450	2535.0-2550.0	

Orange will use one carrier on LTE band 7 with channel BW of 15MHz.

LTE Band	Earfcn DL	DL Freq. (MHz)	Uarfcn UL	UL Freq. (MHz)	Convention
7	3350	2680	21350	2560	

6 Measurements methodology

6.1 PIM

The 3rd order product (IM3) is primarily to be used to characterize PIM performance on the DAS system. The IM3 signal generated by a PIM source is usually higher magnitude than the other PIM products enabling higher measurement accuracy.

Measurement procedure and investigation is required for each segment/path of the installed DAS (like sector).

6.1.1 PIM Measurement Power

Due to magnitude of PIM generated by a defect changes depending on the applied test power, it is important that all specifications clearly state what power level to use when performing the test. In the scope of this procedure Proximus requires +43dBm (20W) per carrier/frequency test tones be used when performing PIM tests on DAS systems.

6.2 PIM Measurement Frequency

PIM test equipment is used to find and eliminate PIM sources on the DAS system. The specific following criteria should be respected:

1. All RF components in the segment/path (Cables, Antennas, Splitters, etc.) must be able to pass the two test frequencies, f1 and f2, and be able to pass the IM frequency you are measuring.
2. The mandatory two frequencies to be used during the PIM test on the **1800MHz**.

6.3 PIM test threshold

The entire DAS system will be considered validated in case:

1. At the DAS input the static result of the PIM tests must not be higher than -107dBm;
2. In case that DAS system is composed by multiple sectors then the pass/fail level is applicable for each sector/RF path.

In case when then DAS system didn't pass the test, all correction has to be performed by the vendor in order to achieve values lower than -107dBm.

Vendor must calibrate the measurement equipment on quarterly based and must indicate the reference used for the calibration which must be much lower than -110dBm.

Vendor has to follow the Maintenance and Repair Model which is defined in the RFQ within agreed SLA.

6.4 Dynamic and Static PIM testing

Dynamic and static guidelines procedure is applicable for troubleshooting purposes to identify the PIM source when the PIM threshold are not fulfilled (see chapter 3: PIM test Threshold).

STATIC Tap Test Guidelines:

1. Tap RF components such as Filters and Antennas, etc. using a hard plastic or rubberized metal object to prevent nicking or damaging protective finishes;
2. Lightly tap the nut and/or back shell of RF connectors using a hard plastic or metal object. Do not tap the coaxial cable itself as this could cause dents in the line;
3. Tap with sufficient force to excite PIM problems if they exist but do not tap with excessive force. A good rule of thumb is that if you tapped your unprotected palm with the same force, it should not hurt;
4. Tap before weatherproofing is installed on RF interconnections. If weatherproofing is in place, substitute a "flex test" to apply stress to the interconnection.

Dynamic Flexible Test Guidelines:

This will be required in order to identify/locate the PIM source.

1. For stiff cables, rock the RF connector back & forth in two orthogonal directions while holding the cable rigid.
2. For flexible cables, hold the RF connector rigid and flex the cable back & forth in two orthogonal directions. Hold the cable approximately 12 inches (300mm) away from the connector and flex the cable ± 1 inch (25mm) in each direction.

During the test only DAS is in the scope of the measurement and MAX, AVG and MIN values must be recorded and available in the report.

6.5 VSWR

VSWR is measured using a portable network analyser with valid certification of calibration. The unit must be suitable (and calibrated) to cover the complete frequency ranges of the operators (700-2700MHz). A copy of the calibration certification must be submitted with each measurement report.

Examples of suitable network analyzers for this purpose are the Anritsu site-master, models 331E or above or Viavi JD723C or higher.

6.5.1 VSWR measurement frequency

The frequency ranges for which the VSWR must be measured for meeting the VSWR threshold value are:


Band	UL Freq. (MHz)	DL Freq. (MHz)	Purpose
800	832.0-862.0	791.0-821.0	LTE
900	880.0-915.0	925.0-960.0	GSM, UMTS
1800	1710.0-1785.0	1805.0-1880.0	GSM, LTE
2100	1920.0-1980.0	2110.0-2170.0	UMTS
2600	2535.0-2550.0	2655.0-2670.0	LTE

These ranges incorporate the entire frequency ranges for these bands, thus also covering future possible refarming of the frequencies of the operators in these bands.

6.6 VSWR Threshold

In the frequency ranges identified for VSWR measurement, VSWR should not exceed 1.45 on any frequency.

Example:

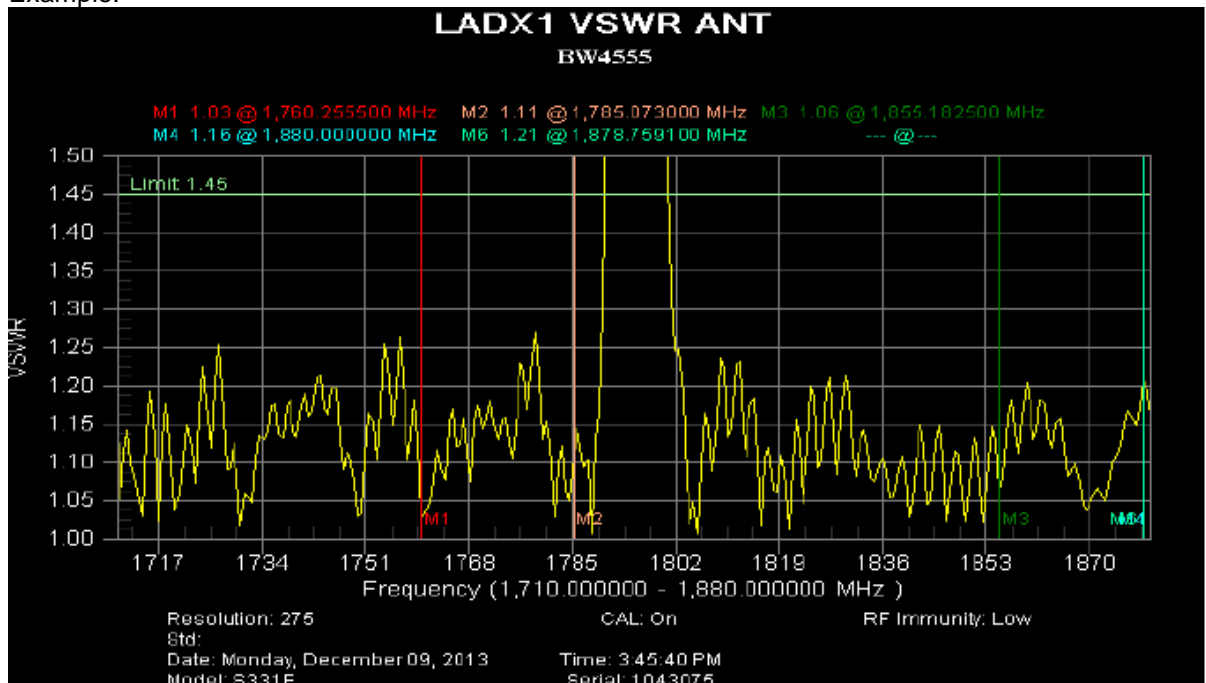

This measurement graph shows that in the frequency range of the 1800 band nowhere the 1.45 threshold is exceeded (1785-1805 is not considered part of this band).

6.6.1 Report template

The PIM and VSWR report must contain:

1. General information of the DAS system:
 - a. Location, date/time, site reference;
 - b. Sectors information;
 - c. Equipment, frequency band used;
2. Graphical PIM reports and PIM thresholds (dBm) in static and/or dynamic mode;
3. Tabular PIM reports (This report compares the peak PIM value to the limit setting for each measurement and presents a "Pass / Fail" result.) in static or dynamic mode;
4. Graphical VSWR reports and VSWR thresholds in static and/or dynamic mode;
5. Tabular VSWR reports (This report compares the peak VSWR value to the limit setting for each measurement and presents a "Pass / Fail" result.) in static or dynamic mode;
6. Conclusions.

The report template to be used for this is the PIM/VSWR DAS quality report.

7 DAS components

For DAS projects for the part where mobile indoor coverage is in the scope, only operator accepted components must be used (listed in the Portfolio DAS equipment).

Annex 4: NOTIFICATION DOCUMENT

M-O DAS

Name and function of the requestor

- Last name:
- First name:
- Company:
- Function:
- Mobile phone:
- E-mail address:
- Address:
.....
.....

Contact information (if different of the requestor):

Contact person can be the building owner, the tenant or the construction company depending on the project and situation. Specify who the contact person is, his/her function is and his/her coordinates:

- Last name:
- First name:
- Company:
- Function:
- Mobile phone:
- E-mail address:
- Address:
.....
.....

Description of the building and mobile indoor project

- State of the building (existing, to be renovated, to be built, other):

.....

.....

.....

.....

- In case of building project:

- Expected start date of the construction:/...../.....
- Expected end date of the construction:/...../.....

- In case of existing building:

- Building to be renovated
 - Expected start date of the renovations:/...../.....
 - Expected end date of the renovations:/...../.....
- Building ready for installation

- Location of the building (lambert coordination of the building and full address)

.....

.....

- Destination of the building (check the adequate box):

Industrial	
Commercial	
Offices	
Hotel/hospital	
Parking	
Other (please specify) :	

- Type of ownership (public, private, mix, other), please specify:

.....

- Estimated number of users and types of users (operator's specific users, visitors, can be different per floor, building area, etc.):

.....

.....

- Building to be rented or owned

- Name and coordinates of the building promoter:

- Last name:
 - First name:
 - Company:
 - Function:
 - Mobile phone:
 - E-mail address:
 - Address:
.....

- If rented: name and coordinates of the tenant(s) and possible contact person(s) (if already known):

- Last name:
 - First name:
 - Company:
 - Function:
 - Mobile phone:
 - E-mail address:
 - Address:
.....

- If owned: name and coordinates of the owner and possible contact person (if already known):

- Last name:
 - First name:
 - Company:
 - Function:
 - Mobile phone:
 - E-mail address:
 - Address:
.....

- Building layout:

Area description	# floors	m ² /floor	Total m ²

- Which floors/areas are to be covered (including undergrounds):

.....

Description of the M-O DAS system:

Which mobile technology (2G en/or 3G and/or 4G) is requested, please specify as completely as possible:

.....

List of attached documents (building(s) drawings, indoor installation pre-design (should also mention the references of the party that has made the pre-design), other):

.....

annex 6 PIM/VSWR passive DAS quality report

Address of the measured location			
Name of the building			
Street			
Zip code		City	
x		y	

DAS contractor information	
Company	
Engineer	
Phone	
Test date	

Operator	Site code	Service 1	Service 2	Service 3	Service 4	Service 5	
1							
2							
3							
Number of sectors in measured location		10	Sector 1	Sector 2	Sector 3	Sector 4	Sector 5
Feeder system		single	single				
Feeder system			Sector 6	Sector 7	Sector 8	Sector 9	Sector 10

VSWR limit: 1,45		PIM limit: -107 dBm		Frequency range		800		900		1800		2100		2600			
						UL	DL	UL	DL	UL	DL	UL	DL	UL	DL		
		1800MHz PIM		Low High		832	791	880	925	1710	1805	1920	2110	2535	2655		
						862	821	915	960	1785	1880	1980	2170	2550	2670		
Sector 1	Feeder 1																
Sector 2	Feeder 1																
Sector 3	Feeder 1																
Sector 4	Feeder 1																
Sector 5	Feeder 1																
Sector 6	Feeder 1																
Sector 7	Feeder 1																
Sector 8	Feeder 1																
Sector 9	Feeder 1																
Sector 10	Feeder 1																